



2021

Product overview 2021



Mr. Walter Wagner
CEO of BAROX GmbH



Barox is Created with 20-year-old scientific experience in lubricants and it covers all aspects of optimized lubricant behavior.

We have put arduous efforts to get special formulation for quality as We care about the health of Your Engines and Machines.



ABOUT US

BAROX GmbH specializes in premium performance engine oils, Gear oils, coolants, brake fluids and other lubricants. The company concentrates the production exceptionally high-quality products for all kind of vehicles and machines. BAROX products made from the finest raw materials and Blended with innovative blenders for keeping the long-life stability and lubricity. The enterprise has established strong technical staff to provide customers with right products in order to bring excellence and fairness.

Quality Revolution

BAROX ULTRA

Lubricant which contain all relevant ingredients that are necessary for an optimal lubrication.

BAROX ULTRA REVO

Lubricant with affordable price and high-quality ingredients that improve lubrication and other performances.

BAROX ULTRA REVO PLUS

Most advanced ingredients, the best performance and the right answer for all requirements.

Our Vision

We are armed with modern tools and latest technologies; we have acquired huge experiences and vision towards Quality. We are in the best of positions to claim a leading role in our Business and **We are doing it.**

Our Mission

Barox Lubricant's goal is to be on quality level of global brands and at the same time offer affordable prices. We care about the health of Your Engines and Machines because Happiness of our Customers with Barox Quality and accessibility is our major Mission.

BAROX PRODUCTS

01 02 03 04 05 06 07 08 09 10



BAROX
ULTRA

For passenger cars

Passenger cars always have varying activity such as sport mode or comfort cruise. Therefore, the engines require intensive lubrication. BAROX ULTRA is a first-class passenger car motor oil with intensive lubricity, which serves all requirements of the mobile engine daily life.

P 8-15



BAROX
VIATA

For commercial vehicles

For commercial vehicles the most important thing is driving long distances. BAROX VIATA is specially formulated for continuous use in vehicles for distance.

P 16-21



BAROX
MOTA

For 2- and 4-stroke vehicles

BAROX MOTA was developed especially for the powers within engines that rotate and ensuring optimum performance.

P 22-25



BAROX
AGRA

For agricultural machinery

Agricultural machinery conquers the wildest paths every day. For this heavy impact, we have developed BAROX AGRA.

P 26-29



BAROX
MARINE

For Marine engines

Marine engines are impacted by the worst conditions and lubricant ingredients are very important for optimization of such engine performance. BAROX MARINE will prove this performance in these conditions.

P 30-33



BAROX
INFINA

For infinite life of gears and Automatic transmissions

Power is significant when it is not reduced by wear and correctly lubricated. BAROX INFINA is specially formulated ATF and Gear oils for optimal power transferring, best antiwear efficiency and infinite stability to aging of gears.

P 34-39



BAROX
TEMPRA

High performance hydraulic brake fluid

Brake fluid for use in automotive disc, drum and anti-skid brake systems and clutch systems.

P 40-43



BAROX
BOOSTA

High-performance hydraulic oil

Power is nothing if it is not managed in right direction. BAROX BOOSTA is formulated to amplify the power of hydraulic system and utilize it correctly.

P 44-47



BAROX
GEAR

Industrial Gear oils

BAROX GEAR is specially formulated Industrial Gear oils for optimal power transferring, best anti-wear efficiency and infinite stability to aging of gears.

P 48-53



BAROX
COOLA

Antifreeze

BAROX COOLA is our multifunctional coolant for all type of vehicles.

P 54-57

GREASE

11



BAROX
ALPHA

High quality greases

Barox Alpha greases are specially formulated greases for high quality for best performances.

P 58-61



BAROX

ULTRA

passenger car engine oil



BAROX ULTRA products are a first-class passenger car motor oil with intensive lubricity, which serves all requirements of the mobile engine daily life.

PRODUCT NAME				SPECIFICATION	FORMER PRODUCTS	PAGES
Barox	ULTRA	REVO PLUS	0w20	SN ACEA C5	BAROX ULTRA 9000 0W20	10
Barox	ULTRA	REVO PLUS	0w30	SN/CF		10
Barox	ULTRA	REVO PLUS	0w40	SN/CF		10
Barox	ULTRA	REVO PLUS	0w40	SN ACEA A3/B4	BAROX ULTRA 9000 0W40	11
Barox	ULTRA	REVO PLUS	5w30	SN ACEA C4	BAROX ULTRA 9000 5W30	11
Barox	ULTRA	REVO PLUS	5w30	SN/CF		11
Barox	ULTRA	REVO PLUS	5w40	SN ACEA A3/B4	BAROX ULTRA 9000 5W40	12
Barox	ULTRA	REVO PLUS	5w40	SN/CF		12
Barox	ULTRA	REVO PLUS	10w40	SN ACEA A3/B4	BAROX ULTRA 7000 10W40	12
Barox	ULTRA	REVO PLUS	10w40	SN/CF		13
Barox	ULTRA	REVO	10w40	SM/CF		13
Barox	ULTRA		10w40	SL/CF		13
Barox	ULTRA	REVO PLUS	10w60	SN/CF		14
Barox	ULTRA		15W40	SL/CD	BAROX ULTRA 5000 15W40	14
Barox	ULTRA		15W40	SJ/CD		14
Barox	ULTRA		20W50	SL/CD	BAROX ULTRA 3000 20W50	15
Barox	ULTRA		20W50	SJ/CD		15



ULTRA

01

BAROX

ULTRA REVO PLUS

0W20 API SN



Barox Ultra Revo Plus 0W-20 is a Premium low-friction motor oil based on synthetic technology. Meets the high requirements resulting from the development towards ever smaller, more powerful engines with the aim of more efficient vehicles and lower emissions. Provides optimum lubrication, excellent lubricating film stability and minimum wear and deposits even under extreme loads. Ideally suited for engines with start-stop system. Ensures maximum performance with low fuel consumption.

Properties	Applications	
» Smooth engine running	Optimum for modern passenger vehicles with gasoline engines. Suitable for use where there are long intervals between oil changes.	
» Outstanding engine cleanliness		
» Excellent wear protection		
» High lubricaton reliability		
» Saves fuel and reduces pollutant emissions		
» High shear stability		
» Optimum stability to aging		
» Long engine service life		
» Tested for turbochargers and catalytic converters		
Meets the requirement	Packaging	item No.
API SN/CF	1L plastic	101001
	4L Plastic	101004
	5L plastic	101005
	208L Drum	101208
	Bulk	101000

BAROX

ULTRA REVO PLUS

0W40 API SN ACEA C5



Barox Ultra Revo Plus SAE 0W-40 modern, fully synthetic, low friction motor oil for all season use. The combination of unconventional synthetic-based oils using advanced additive technology ensures low viscosity and high shear stability for the motor oil and reliably prevents the formation of deposits, reducing frictional loss in the engine and providing the optimal protection from wear. Barox Ultra Revo Plus SAE 0W-40 is recommended for gasoline engines, including engines with turbochargers and catalytic converters.

Properties	Applications	
» instant lubrication after cold start	Suitable for use where there are long intervals between oil changes and high engine load.	
» outstanding engine cleanliness		
» high lubrication reliability		
» high wear resistance		
» highest fuel economy		
» tested for turbochargers and catalytic converters		
» outstanding high temperature stability		
Meets the requirement	Packaging	item No.
API SN ACEA C5	1L plastic	122001
	4L Plastic	122004
	5L plastic	122005
	208L Drum	122208
	Bulk	122000

BAROX

ULTRA REVO PLUS

0W30 API SN



Barox Ultra Revo Plus SAE 0W-30 is a highly modern, fully synthetic, long-life engine oil which has been specially developed for the latest requirements for extending maintenance intervals. This engine oil is specified for gasoline engines with and without exhaust-gas turbocharging and pump-inject or systems. The combination of an unconventional synthetic basis with advanced additive technology has resulted in a guaranteed low-viscosity engine oil which is stable to high shear. This product prevents deposit formation and reduces frictional losses in the engine while protecting it from wear. The results are savings in fuel and an extended service life for the engine.

Properties	Applications	
» Excellent wear resistance	Optimum for modern passenger vehicles with gasoline engines with and without turbochargers and also pump-injector-systems.	
» Outstanding engine cleanliness		
» Reduces frictional losses		
» Tested for turbochargers and catalytic		
» High shear stability		
» Instant lubrication after cold start		
» Outstanding lubrication reliability		
» Highest fuel economic		
Meets the requirement	Packaging	item No.
API SN/CF	1L plastic	102001
	4L Plastic	102004
	5L plastic	102005
	208L Drum	102208
	Bulk	102000

BAROX

ULTRA REVO PLUS

5W30 API SN ACEA C4



Barox Ultra Revo Plus 5W-30 ACEA C4 a first class, modern, low- friction engine oil for year-round use. The combination of unconventional hydrocracked-based base oils and the latest additive technology has provided an engine oil which is guaranteed to reduce oil and fuel consumption while providing for rapid oil penetration in the engine. In addition, Low-Friction 5W-30 SN is best suitable for passenger cars.

Properties	Applications	
» Smooth engine running	Optimum for modern passenger vehicles with gasoline engines with and without turbochargers and also pump-injector-systems.	
» Instant lubrication after cold start		
» High lubrication realibility		
» Outstanding engine cleanliness		
» Excellent resistance to aging		
» Optimum oil pressure under all operating conditions		
» Saves fuel and reduces pollutant emissions		
» Miscible with all commercially available motor oils		
Meets the requirement	Packaging	item No.
API SN/CF, ACEA C4 , MB 229.5/3/1, VW 502.00/505.00	1L plastic	120001
	4L Plastic	120004
	5L plastic	120005
	208L Drum	120208
	Bulk	120000

BAROX

ULTRA REVO PLUS

0W40 API SN



Barox Ultra Revo Plus SAE 0W-40 modern, fully synthetic, low friction motor oil for all season use. The combination of unconventional synthetic-based oils using advanced additive technology ensures low viscosity and high shear stability for the motor oil and reliably prevents the formation of deposits, reducing frictional loss in the engine and providing the optimal protection from wear. Barox Ultra Revo Plus SAE 0W-40 is recommended for gasoline engines, including engines with turbochargers and catalytic converters.

Properties	Applications	
» instant lubrication after cold start	Optimal for modern passenger vehicles with gasoline engines with and without turbochargers and with and without charge air cooling. Especially suitable where there are long intervals between oil changes required.	
» outstanding engine cleanliness		
» high lubrication reliability		
» high wear resistance		
» highest fuel economy		
» tested for turbochargers and catalytic converters		
» outstanding high temperature stability		
Meets the requirement	Packaging	item No.
API SN/CF	1L plastic	103001
	4L Plastic	103004
	5L plastic	103005
	208L Drum	103208
	Bulk	103000

BAROX

ULTRA REVO PLUS

5W30 API SN



Barox Ultra Revo Plus 5W-30 SN is a first class, modern, low- friction engine oil for year-round use. The combination of unconventional hydrocracked-based base oils and the latest additive technology has provided an engine oil which is guaranteed to reduce oil and fuel consumption while providing for rapid oil penetration in the engine. In addition, Low-Friction 5W-30 SN is best suitable for passenger cars.

Properties	Applications	
» Smooth engine running	Optimum for modern gasoline engines with multi-valve technology and turbocharging with and without charge air cooling, and for use in passenger cars. Especially suitable where there are long intervals needed.	
» Instant lubrication after cold start		
» High lubrication realibility		
» Outstanding engine cleanliness		
» Excellent resistance to aging		
» Optimum oil pressure under all operating conditions		
» Saves fuel and reduces pollutant emissions		
» Miscible with all commercially available motor oils		
Meets the requirement	Packaging	item No.
API SN/CF, ACEA A5/B5-12, MB 229.5/3/1, VW 502.00/505.00, RN 710/700	1L plastic	104001
	4L Plastic	104004
	5L plastic	104005
	208L Drum	104208
	Bulk	104000

BAROX

ULTRA REVO PLUS

5W40 API SN ACEA A3/B4



Barox Ultra Revo Plus 5W-40 is a high-tech low-viscosity engine oil based on synthetic technology. With improved wear-protection formula. Reduces oil thickening through particulate drag-in. Arrive at your destination faster and safer with maximum engine performance and power reserves. Exceeds the highest test requirements demanded by renowned manufacturers.

Properties	Applications	
» High shear stability	For all common types of vehicles with gasoline engines. Miscible with all commercially available engine oils.	
» Suitable for all common types of vehicle		
» Excellent low temperature behavior		
» Saves fuel and reduces pollutant emissions		
» High wear resistance		
» Optimum stability to aging		
» Outstanding engine cleanliness		
» Instant lubrication after cold start		
Meets the requirement	Packaging	item No.
AAPI SN/CF, ACEA A3/B4-12, MB 229.5/3/1, VW 502.00/505.00, RN 710/700, Porsche A40	1L plastic	121001
	4L Plastic	121004
	5L plastic	121005
	208L Drum	121208
	Bulk	121000

BAROX

ULTRA REVO PLUS

10W40 API SN



Barox Ultra Revo Plus 10W-40 is a High-tech synthetic all-season, low-friction motor oil. Super Low-Friction was developed for the toughest requirements of modern, high-performance gasoline engines without extended maintenance intervals. Tested for use with catalytic converters and turbochargers. Saves fuel and provides optimal wear protection. The formulation has a beneficial effect on sealing materials and thus on the leaktightness of engines.

Properties	Applications	
» Outstanding engine cleanliness	Especially suitable for in modern gasoline engines.	
» High shear stability		
» high lubrication reliability		
» Saves fuel and reduces pollutant emissions		
» Smooth engine running		
» Excellent wear protection		
» Optimum stability to aging		
» Tested for turbochargers and catalytic converters		
Meets the requirement	Packaging	item No.
API SN, MB229.1/3, VW502.00/505.00, PSA B71 2300, Renault RN 700	1L plastic	107001
	4L Plastic	107004
	5L plastic	107005
	208L Drum	107208
	Bulk	107000

BAROX

ULTRA REVO PLUS

5W40 API SN



Barox Ultra Revo Plus 5W-40 is a high-tech low-viscosity engine oil based on synthetic technology. With improved wear-protection formula. Reduces oil thickening through particulate drag-in. Arrive at your destination faster and safer with maximum engine performance and power reserves. Exceeds the highest test requirements demanded by renowned manufacturers.

Properties	Applications	
» High shear stability	For all common types of vehicles with gasoline engines. Miscible with all commercially available engine oils.	
» Suitable for all common types of vehicle		
» Excellent low temperature behavior		
» Saves fuel and reduces pollutant emissions		
» High wear resistance		
» Optimum stability to aging		
» Outstanding engine cleanliness		
» Instant		
Meets the requirement	Packaging	item No.
API SN, MB 229.5/3/1, VW 502.00/505.00, RN 710/700	1L plastic	105001
	4L Plastic	105004
	5L plastic	105005
	208L Drum	105208
	Bulk	105000

BAROX

ULTRA REVO

10W40 API SM



Barox Ultra 10W-40 High-performance, low-friction engine oil based on synthetic technology. It is suitable for year-round use in modern gasoline vehicle engines which recommended to use API SM engine oils.

Properties	Applications	
» high lubrication reliability	Optimum oil for modern gasoline and passenger vehicle engines.	
» Smooth engine running		
» Optimum stability to aging		
» Saves fuel and reduces pollutant emissions		
» High shear stability and engine cleanliness		
» High wear and shear resistance		
Meets the requirement	Packaging	item No.
API SM	1L plastic	108001
	4L Plastic	108004
	5L plastic	108005
	208L Drum	108208
	Bulk	108000

BAROX

ULTRA REVO PLUS

10W40 API SN ACEA A3/B4



Barox Ultra Revo Plus 10W-40 ACEA A3/B4 is a High-tech synthetic all-season, low-friction motor oil. Super Low-Friction was developed for the toughest requirements of modern, high-performance gasoline engines without extended maintenance intervals. Tested for use with catalytic converters and turbochargers. Saves fuel and provides optimal wear protection. The formulation has a beneficial effect on sealing materials and thus on the leaktightness of engines.

Properties	Applications	
» Outstanding engine cleanliness	Especially suitable for modern gasoline engines.	
» High shear stability		
» high lubrication reliability		
» Saves fuel and reduces pollutant emissions		
» Smooth engine running		
» Excellent wear protection		
» Optimum stability to aging		
» Tested for turbochargers and catalytic converters		
Meets the requirement	Packaging	item No.
API SN ACEA A3/B4-12, MB229.1/3, VW502.00/505.00, PSA B71 2300, Renault RN 700	1L plastic	123001
	4L Plastic	123004
	5L plastic	123005
	208L Drum	123208
	Bulk	123000

BAROX

ULTRA

10W40 API SL



Barox Ultra 10W-40 is a high performance low-friction motor oil for year-round use. The combination of unconventional base oils and advanced additive technology ensures that the motor oil is of low viscosity with a high shear stability and reliably prevents the formation of deposits, significantly reducing frictional losses in the engine and providing the optimum protection from wear. This results in fuel savings and an extended service life for the engine.

Properties	Applications	
» Optimum stability to aging	Best for modern gasoline and passenger vehicle engines. For the protection and value conservation of the engine during long intervals between oil changes and when there are extreme engine requirements.	
» Outstanding engine cleanliness		
» High shear stability		
» Friction and wear reducing		
» Excellent wear production		
» Saves fuel and reduces pollutant emissions		
» Miscible with all commercially available motor oils		
Meets the requirement	Packaging	item No.
API SL, ACEA A3/B3-12, MB229.1	1L plastic	109001
	4L Plastic	109004
	5L plastic	109005
	208L Drum	109208
	Bulk	109000

BAROX ULTRA REVO PLUS

10W60 API SN



Barox Ultra Revo Plus 10W-60 is a fully synthetic high-performance engine oil for extreme operating conditions. With wide-band viscosity 10W-60 and high temperature stability. Optimizes engine performance. For immediate lubrication at cold start and very good wear protection.

Properties	Applications	
» Outstanding engine cleanliness	For gasoline engines	
» High lubrication reliability	with and without	
» Tested for the use with catalytic converters	turbocharging. Especially	
» Optimum stability to aging	suitable for extreme	
» Optimum lubrication in extreme operating conditions	engine requirements and	
» Instant lubrication after cold start	racing.	
» Extremely low oil consumption		
» Extremely low evaporation loss		
Meets the requirement	Packaging	item No.
API SN	1L plastic	110001
	4L Plastic	110004
	5L plastic	110005
	208L Drum	110208
	Bulk	110000

BAROX ULTRA

15W40 API SL



Barox Ultra 15W-40 is all-season high-performance motor oil with selected base oils in conjunction with new future-oriented additive technology. Prevents from oil sludge. The formulation has a beneficial effect on sealing materials and thus on the leaktightness of engines. Ensures low oil consumption. High lubricating film stability ensures reliable operation.

Properties	Applications	
» Optimum stability to aging	For engines with high	
» High wear resistance	mileage. Universal engine	
» Prevents black sludge	oil for gasoline engines.	
» Low evaporation loss	Especially suitable where	
» High shear stability	there are long intervals	
» Very good dispersion properties	between oil changes	
» Good cleaning action	and extreme running	
» Tested for the use with catalytic converters	conditions.	
Meets the requirement	Packaging	item No.
API SL, MB229.1	1L plastic	112001
	4L Plastic	112004
	5L plastic	112005
	208L Drum	112208
	Bulk	112000

BAROX ULTRA

15W40 API SJ



Barox Ultra SAE 15W-40 is a year-round, high-performance, multi-purpose engine oil which is suitable for efficient lubrication in a mixed vehicle fleet. This optimum combination of selected additives and outstanding base oils is suitable gasoline engines.

Properties	Applications	
» Very good dispersion properties	Universal engine oil for	
» Outstanding oil film strength	gasoline engines which	
» High shear stability	API SJ oil recommended.	
» High wear resistance	Especially suitable where	
» Good cleaning action	there are long intervals	
» Prevents black sludge	between oil changes	
» Low evaporation loss	and extreme running	
	conditions.	
Meets the requirement	Packaging	item No.
API SJ	1L plastic	113001
	4L Plastic	113004
	5L plastic	113005
	208L Drum	113208
	Bulk	113000

BAROX ULTRA

20W50 API SL/CD



Barox Ultra 20W50 API: SL is a mineral based motor oil which provides especially good dirt-suspending and cleaning power. Ensures the greatest lubricating film stability, ideal oil pressure and maximum wear protection even under critical conditions. For vehicles with tried and tested engine technology.

Properties	Applications	
» Very good dispersion properties	All-year oil for gasoline	
» High lubrication reliability	and diesel engines. Can	
» Prevents black sludge	be used on all vehicles	
» Low evaporation loss	where API SL oil is	
» Excellent wear resistance	recommended.	
» Excellent cleaning effect		
» Optimum stability to aging		
» High shear stability		
Meets the requirement	Packaging	item No.
API SL, MB229.1(v2012.2)	1L plastic	114001
	4L Plastic	114004
	5L plastic	114005
	208L Drum	114208
	Bulk	114000

BAROX ULTRA

20W50 API SJ/CD



Barox Ultra Revo Plus 5W-30 ACEA C4 is a year-round engine oil formulated from selected mineral base oils. The high additive content guarantees optimum lubrication under extreme running conditions and with long periods between oil changes.

Properties	Applications	
» Outstanding emergency-running properties	Engine oil for gasoline	
» Outstanding engine cleanliness	and diesel turbocharged	
» Excellent wear protection	engines. Especially	
» Instant lubrication after cold start	suitable where API SJ/CD	
» Low evaporation loss	oil is recommended.	
Meets the requirement	Packaging	item No.
API SJ/CD	1L plastic	116001
	4L Plastic	116004
	5L plastic	116005
	208L Drum	116208
	Bulk	116000





For commercial vehicles the most important thing is driving long distances. BAROX VIATA is specially formulated for continuous use in vehicles for distance.

PRODUCT NAME			SPECIFICATION		FORMER PRODUCTS	PAGES
Barox	VIATA	REVO PLUS	5W40	CJ4		18
Barox	VIATA	REVO PLUS	10W40	CJ4		18
Barox	VIATA	REVO	10W40	CI-4 ACEA E4/E7	BAROX ULTRA HD-7000 10W40	18
Barox	VIATA	REVO	10W40	CI4	BAROX ULTRA HD-7000 10W40	19
Barox	VIATA		10W40	CF4		19
Barox	VIATA	REVO PLUS	15W40	CJ4		19
Barox	VIATA	REVO	15W40	CI4/CH4/	BAROX ULTRA HD-5000 15W40	20
Barox	VIATA		15W40	CF4/CF		20
Barox	VIATA	CNG	15W40	CF		20
Barox	VIATA	REVO	20W50	CI4/CH4		21
Barox	VIATA		20W50	CF4/CF	BAROX ULTRA HD-3000 20W50	21
Barox	VIATA		SAE50	CF		21



VIATA



BAROX VIATA REVO PLUS 5W40 API CJ4



Barox Viata Revo Plus SAE 5W-40 CJ4 is an Ultra high performance Diesel engine oil designed to meet the most severe performance requirements of the latest high output. Low emission lubricants required for environment protection agency (EPA) regulation compliant Diesel engine equipped with after treatment devices such as Diesel oxidation catalysts and particulate filters

Properties

- » Extended service intervals
- » Outstanding oil consumption control
- » Superior deposit control
- » Excellent wear protection
- » Superb oxidation stability

Applications

Optimum oil for aspirated and turbo diesel engines with and without charge air cooling. Especially suitable where there are long intervals between oil changes and extreme engine requirements.

Meets the requirement	Packaging	item No.
API CJ4	1L plastic	1521001
	5L Plastic	1521005
	20L plastic	1521020
	208L Drum	1521208
	Bulk	1521000

BAROX VIATA REVO 10W40 API CI-4



Barox VIATA REVO, SAE 10W40, API CI4/ CH4 is a high-performance engine oil. It is designed for modern gasoline engines and light duty diesel engines including all turbo versions for the use in extreme operating conditions. This motor oil provides long engine life against wear and friction.

Properties

- » Excellent engine protection
- » Outstanding performance in all seasons
- » Optimal friction properties
- » Outstanding thermal and oxidation stability
- » Outstanding low temperature properties
- » Excellent detergent / dispersant capability

Applications

Premium Semi Synthetic Formula
Advanced quality motor oil for diesel vehicles

Meets the requirement	Packaging	item No.
API CI-4	1L plastic	155001
	5L Plastic	155005
	20L plastic	155020
	208L Drum	155208
	Bulk	155000

BAROX VIATA REVO PLUS 10W40 API CJ4



Barox Viata Revo Plus 10w-40 CJ4 is Low-friction engine oil produced with synthesis technology. Reduces oil thickening caused by drag-in of soot. Keeps oil consumption low. Even under critical operating conditions, it assures optimum oil pressure and a stable lubricating film. Due to state-of-the-art additive technology together with unconventional base oils, this motor oil ensures outstanding low-friction and wear protection properties while facilitating the maximum length of time between oil changes.

Properties

- » Outstanding oil film strength
- » High wear resistance smooth engine running
- » Oil and fuel savings
- » Outstanding engine cleanliness
- » Instant lubrication after cold start
- » Reliable cold start

Applications

Used for all diesel engines with and without exhaust-gas turbocharging and with and without intercooling. Especially suitable where there are long intervals between oil changes and heavy duty engine requirements.

Meets the requirement	Packaging	item No.
API CJ4	1L plastic	154001
	5L Plastic	154005
	20L plastic	154005
	208L Drum	154208
	Bulk	154000

BAROX VIATA 10W40 API CF4



Barox Viata 10W40 API CF4 diesel engine oil is formulated with high-quality base stocks and a balanced additive system to ensure optimum performance and protection for diesel engines requiring an API CF-4 specification. Suitable for diesel engines fitted on trucks, buses, construction machinery for both turbocharged and normally aspirated engines operating under severe service conditions in all seasons.

Properties

- » Reduces fuel consumption
- » Oil film strength
- » high wear resistance
- » Prevents "bore polishing"
- » Broad operating temperature range
- » High shear stability
- » Excellent cold-start behavior
- » Outstanding detergent and dispersant properties

Applications

Used for all diesel engines with and without exhaust-gas turbocharging and with and without intercooling. Especially suitable where there are long intervals between oil changes and heavy duty engine requirements.

Meets the requirement	Packaging	item No.
API CF-4/CF	1L plastic	156001
	5L Plastic	156005
	20L plastic	156020
	208L Drum	156208
	Bulk	156000

BAROX VIATA REVO 10W40 API CI-4 ACEA E4/E7



Barox VIATA REVO, SAE 10W40, API CI4 ACEA E4/E7

is a high-performance engine oil. It is designed for modern gasoline engines and light duty diesel engines including all turbo versions for the use in extreme operating conditions. This motor oil provides long engine life against wear and friction.

Properties

- » Excellent engine protection
- » Outstanding performance in all seasons
- » Optimal friction properties
- » Outstanding thermal and oxidation stability
- » Outstanding low temperature properties
- » Excellent detergent / dispersant capability

Applications

Premium Semi Synthetic Formula
Advanced quality motor oil for diesel vehicles

Meets the requirement	Packaging	item No.
API CI-4 ACEA E4/E7	1L plastic	166001
	5L Plastic	166005
	20L plastic	166020
	208L Drum	166208
	Bulk	166000

BAROX VIATA REVO PLUS 15W40 API CJ4



Barox Viata Revo Plus 15W-40 CJ4

Complete Protection is an extra high performance diesel engine oil that helps extend engine life in the most severe on and off-highway applications while delivering outstanding performance in modern, high-output, low-emission engines including those with Exhaust Gas Recirculation (EGR) and Aftertreatment Systems with Diesel Particulate Filters (DPFs) and Diesel Oxidation Catalysts (DOCs). Fully backwards compatible, Barox Viata Revo Plus 15W-40 Complete Protection will also deliver the same exceptional performance in older conventional engines

Properties

- » Superior soot-viscosity control
- » Outstanding thermal and oxidative stability
- » Excellent oil consumption control
- » Stay-in-grade shear stability
- » Excellent low temperature pumpability
- » Superb resistance to corrosive and abrasive wear

Applications

Heavy Duty Diesel Engines including Euro V/VI Modern Low Emissions Vehicles, Utilizing Technologies such as Diesel Particulate Filter (DPF), Selective Catalytic Reduction (SCR), Continuously Regenerating Traps (CRT), Diesel Oxidation Catalysts (DOC) and Exhaust Gas Recirculation (EGR).

Meets the requirement	Packaging	item No.
API CJ4	1L plastic	157001
	5L Plastic	157005
	20L plastic	157020
	208L Drum	157208
	Bulk	157000

BAROX VIATA REVO

15W40 API CI4



BAROX VIATA REVO SAE 15W40 API CI4 is a high performance engine oil developed for use in various diesel engines. This lubricating oil is suitable for modern diesel engines with turbochargers, multi-valve engines, direct injection with the EGR system.

Properties

- » Excellent oxidation and heat stability
- » Developed specifically for diesel engine
- » Fuel saving through better viscosity-temperature behavior
- » Excellent washing / dispersing power

Applications

High Quality Formula
Mineral quality motor oil for diesel vehicles

Meets the requirement	Packaging	item No.
API CI4	1L plastic	158001
	5L Plastic	158005
	20L plastic	158020
	208L Drum	158208
	Bulk	158000

BAROX VIATA

15W40 API CF4/CF



Barox Viata 15W-40 API CF4/CF is a good performance, heavy duty engine oil that provides proven protection to diesel engines operating in severe on and off-highway service applications. Barox Viata 15W40 CF-4/CF Oil 15W-40 is primarily intended for use in diesel Commercial Vehicles.

Properties

- » Outstannding detergent and dispersant properties
- » Stable to aging and stable viscosity
- » Excellent wear resistance

Applications

Suitable for universal use but especially for normal diesel engines. Ideal for vehicles without turbochargers.

Meets the requirement	Packaging	item No.
API CF4/CF	1L plastic	160001
	5L Plastic	160005
	20L plastic	160020
	208L Drum	160208
	Bulk	160000

BAROX VIATA CNG

15W40 API CF



Barox VIATA CNG SAE 15W40 API CF is CNG engine oil for all CNG engine vehicles with the latest technology. It meets the requirements of advanced engine oil grade of API CF. It is optimized to lubricate a wide range of CNG line engines under severe conditions. The main additive is mandatory for use CNG applications such as Transit buses, School buses, Refuse trucks, Air-port and Inter City shuttles, as well as equipment such as CNG powered street sweepers.

Properties

- » Extended oil-drain interval capability
- » Improved copper corrosion control

Applications

Premium semi
Synthetic Formula
Advanced CNG-4T-
LPG motor oil

Meets the requirement	Packaging	item No.
API CF	1L plastic	171001
	5L Plastic	171005
	20L plastic	171020
	208L Drum	171208
	Bulk	171000

BAROX VIATA REVO

20W50 API CI4



Barox Viata Revo 20W50 CI4 designed for diesel engines and formulated to provide outstanding protection to modern, high performance diesel engines used in the toughest on and off-highway applications.

Properties

- » Excellent engine cleanliness through advanced soot handling technology
- » Exceptional low engine wear
- » Trouble free operation between log drain service intervals
- » Reduced maintenance capabilities
- » Low evaporation loss

Applications

Barox Viata Revo 20W50 is suitable for turbocharged for a wide range of cars, light trucks and buses operating on short and long heavy-loaded diesel engines, turbocharged or nonjourneys in an extremely hot climate and intensive operating conditions

Meets the requirement	Packaging	item No.
API CI-4 , ACEA E7-16, MB228.3	1L plastic	161001
	5L Plastic	161005
	20L plastic	161020
	208L Drum	161208
	Bulk	161000

BAROX VIATA

20W50 API CF4



Barox Viata 20W50 CF4 is a High Performance diesel engine oil meeting and exceeding API CF-4 standard and available in a shear stable viscosity grade. This lubricant has been developed as a long life oil.

Properties

- » Excellent engine cleanliness through advanced soot handling technology
- » Mixed fleet capabilities
- » Exceptional low engine wear
- » Trouble free operation between long drain service intervals
- » Reduced maintenance capabilities
- » Low oxidation

Applications

Barox Viata 20W50 CF-4 is recommended for Mixed fleets of automotive diesel truck manufacturers. Also it is suitable for all vehicles makes used in long distance transport , heavy duty earthmoving and lifting equipments & diesel generator sets

Meets the requirement	Packaging	item No.
API CF-4	1L plastic	162001
	5L Plastic	162005
	20L plastic	162020
	208L Drum	162208
	Bulk	162000

BAROX VIATA

SAE50 API CF



Barox Viata SAE50 CF
Very mildly blended mineral-based single-grade motor oil. Specially tailored to the requirements of classic diesel engines. Selected base oils and additives guarantee optimum lubrication and very good wear protection under all operating conditions.

Properties

- » Excellent corrosion
- » High lubrication realibility
- » Excellent wear resistance
- » Suitable for classic motorcycles without oil filter

Applications

Specially designed for classic diesel engines in which an unblended or very mildly blended lubricant is required.

Meets the requirement	Packaging	item No.
API CF	1L plastic	175001
	5L Plastic	175005
	20L plastic	175020
	208L Drum	175208
	Bulk	175000



BAROX MOTA was developed especially for the powers within engines that rotate and ensuring optimum performance.

PRODUCT NAME				SPECIFICATION	PAGES
Barox	MOTA	REVO PLUS 4T	10w40	API SL/CF JASO MA2	24
Barox	MOTA	REVO 4T	20w50	API SL/CF JASO 4T	24
Barox	MOTA	REVO 2T	API TC, JASO FD 2T	API TC, JASO FD 2T	24



BAROX MOTA REVO PLUS

10W40 API SL, JASO MA2



BAROX ULTRA REVO PLUS 4T SAE 10W-40 is a Heavy-duty motor oil based on selected mineral oils. Ensures optimum performance and protection of the engine under all operating conditions. Reliable lubrication, optimum noise damping and low wear are just as much taken for granted as gentle clutch engagement and dis-engagement and gear shifting.

Properties <ul style="list-style-type: none">» Especially suitable for wet clutches» Guarantees low oil consumption» Optimum lubrication under all operating conditions» Optimum stability to aging» High shear stability» Outstanding engine cleanliness» High wear resistance	Applications Developed for air and water-cooled 4-stroke engines exposed to normal to tough operating conditions. Suitable for engines with or without a wet clutch.	
	Meets the requirement	Packaging item No.
	API SL , JASO MA2	1L plastic 142001
		4L Plastic 142004
		5L plastic 142005
		208L Drum 142208
		Bulk 142000

BAROX MOTA REVO 4T

20W50 API SL/CF JASO 4T



BAROX MOTA REVO 4T SAE 20w50, API SL/CF, JASO4T is a lubricant that is perfect for four-stroke engines. It provides high thermal stability and its viscosity grade facilitates engine start-up at all temperatures.

Properties <ul style="list-style-type: none">» Especially suitable for wet clutches» Guarantees low oil consumption» Optimum lubrication under all operating conditions» Optimum stability to aging» High shear stability» Outstanding engine cleanliness» High wear resistance	Applications Developed for air and water-cooled 4-stroke engines exposed to normal to tough operating conditions. Suitable for engines with or without a wet clutch.	
	Meets the requirement	Packaging item No.
	API SL/CF JASO 4T	1L plastic 141001
		4L Plastic 141004
		5L plastic 141005
		208L Drum 141208
		Bulk 141000

BAROX MOTA REVO 2T

20W50 API TC, JASO FD



BAROX MOTA REVO 2T SAE API TC, JASO FD is suitable for general everyday use. It is mineral engine oil for small displacement, two-stroke motor-cycles engines formulated with high quality mineral base oils combined with balanced additives to achieve the following properties

Properties <ul style="list-style-type: none">» Especially suitable for wet clutches» Guarantees low oil consumption» Optimum lubrication under all operating conditions» Optimum stability to aging» High shear stability» Outstanding engine cleanliness» High wear resistance	Applications Developed for air and water-cooled 2-stroke engines exposed to normal to tough operating conditions.	
	Meets the requirement	Packaging item No.
	API TC, JASO FD	1L plastic 140001
		4L Plastic 140004
		5L plastic 140005
		208L Drum 140208
		Bulk 140000





Agricultural Machinery need to nonstop work and on time suitable lubricant. BAROX AGRA specially formulated multifunctionally as your Agra machinery

PRODUCT NAME				SPECIFICATION	PAGES
Barox	AGRA	UTTO	Multipurpose 10w30	GL-4	28
Barox	AGRA	UTTO	Multipurpose 10w40	GL-4	28
Barox	AGRA	UTTO	Multipurpose 15W40	GL-4	28
Barox	AGRA	STOU	10W30	CG4 GL4	29
Barox	AGRA	STOU	10W40	CG4 GL4	29
Barox	AGRA	STOU	15W40	CG4 GL4	29



AGRA

BAROX AGRA UTTO MULTIPURPOSE 10W30 API GL-4



Barox Agra Utto Multipurpose 10W30 GL-4 which has been specially developed for agricultural machines. This product is designed to match the features and meet the requirements of different tractor specifications for engine, manual and axle transmissions, hydraulic systems, fluid flywheels and wet brakes.

Properties

- » High wear resistance
- » High pressure-absorption capability
- » Outstanding oil film strength
- » Guarantees smooth gearshifting
- » Universal application
- » Retionalizes storage

Applications

Suitable as a universal oil for transmissions, engines, hydraulic systems and wet brakes for high-load tractor units.

Meets the requirement	Packaging	item No.
API GL-4	1L plastic	430001
	5L Plastic	430005
	20L plastic	430020
	208L Drum	430208
	Bulk	430000

BAROX AGRA UTTO MULTIPURPOSE 10W40 API GL-4



Barox Agra Utto Multipurpose 10W40 GL-4 which has been specially developed for agricultural machines. This product is designed to match the features and meet the requirements of different tractor specifications for engine, manual and axle transmissions, hydraulic systems, fluid flywheels and wet brakes.

Properties

- » High wear resistance
- » High pressure-absorption capability
- » Outstanding oil film strength
- » Guarantees smooth gearshifting
- » Universal application
- » Retionalizes storage

Applications

Suitable as a universal oil for transmissions, engines, hydraulic systems and wet brakes for high-load tractor units.

Meets the requirement	Packaging	item No.
API GL4	1L plastic	431001
	5L Plastic	431005
	20L plastic	431020
	208L Drum	431208
	Bulk	431000

BAROX AGRA UTTO MULTIPURPOSE 15W40 API GL-4



BAROX AGRA UTTO Multipurpose 15W40 API GL-4 is used for the lubrication of almost any type of transmissions, differentials and wet brakes, for final drives and torque converters in tractors and for hydraulic systems and power assisted steering, agricultural and road construction equipment.

Properties

- » Good anti-rust and anti-corrosion properties
- » Very good extreme pressure and anti-wear properties
- » Excellent friction properties for us in "wet" couplings
- » Excellent stable Viscosity index
- » Low pour point

Applications

Suitable as a universal oil for transmissions, engines, hydraulic systems and wet brakes for high-load tractor units.

Meets the requirement	Packaging	item No.
API GL-4	1L plastic	432001
	5L Plastic	432005
	20L plastic	432020
	208L Drum	432008
	Bulk	432000

BAROX AGRA STOU 10W30 API CG4 GL-4



BAROX AGRA STOU 10W30 API CG4 GL4 is a Universal multigrade oil for engines, transmissions, wet brakes and hydraulic systems of agricultural tractors. BAROX AGRA STOU 10W30 API CG4 GL4 has superior cold temperature properties, which guarantee instant lubrication and significantly reduced risk of wear. The specifically chosen components contribute to viscosity stability and ensure longterm durability.

Properties

- » Anti-wear and oxidation stability : proven protection of critical parts.
- » Cold start : excellent fluidity at low temperature.

Applications

This oil is intended for the lubri-cation of gear boxes, differen-tials, final drives, power take-off, wet brakes and hydraulic systems of agricultural tractors and engines for off-highway equipment.

Meets the requirement	Packaging	item No.
API CG4 GL4	1L plastic	433001
	5L Plastic	433005
	20L plastic	433020
	208L Drum	433208
	Bulk	433000

BAROX AGRA STOU 10W40 API CG4 GL-4



BAROX AGRA STOU 10W40 API CG4 GL4 is a semi synthetic lubricant based on carefully selected highly refined base oils for engines, transmissions, wet brakes and hydraulic systems of agricultural tractors. BAROX AGRA STOU 10W40 API CG4 GL4 has superior cold temperature properties, which guarantee instant lubrication and significantly reduced risk of wear. The specifically chosen components contribute to viscosity stability and ensure long-term engine and oil durability.

Properties

- » Anti-wear and oxidation stability : proven protection of critical parts.
- » Cold start : excellent fluidity at low temperature.

Applications

This oil is optimized for the lubrication of gearboxes, rear axles, final drives, power take-offs, wet brakes, hydraulic systems of agricultural tractors and off-road equipment.

Meets the requirement	Packaging	item No.
API CG4 GL4	1L plastic	434001
	5L Plastic	434005
	20L plastic	434020
	208L Drum	434208
	Bulk	434000

BAROX AGRA STOU 15W40 API CG4 GL-4



BAROX AGRA STOU 15W40 API CG4 GL4 is a Universal multigrade oil for engines, transmissions, wet brakes and hydraulic systems of agricultural tractors. BAROX AGRA STOU 15W40 API CG4 GL4 has superior cold temperature properties, which guarantee instant lubrication and significantly reduced risk of wear. The specifically chosen components contribute to viscosity stability and ensure long-term engine and oil durability.

Properties

- » Anti-wear and oxidation stability : proven protection of critical parts.

Applications

This oil is optimized for the lubrication of gearboxes, rear axles, final drives, power take-offs, wet brakes, hydraulic systems of agricultural tractors and off-road equipment.

Meets the requirement	Packaging	item No.
API CG4 GL4	1L plastic	435001
	5L Plastic	435005
	20L plastic	435020
	208L Drum	435208
	Bulk	435000



Marine engines are impacted by the worst conditions and lubricant ingredients are very important for optimization of such engine performance. BAROX MARINE will prove this performance in these conditions.

PRODUCT NAME			SPECIFICATION		PAGES
Barox	MARINE	PLUS 2T	SAE 20	API TC	32
Barox	MARINE	EXTRA 4T	SAE 30	API TC	32



BAROX MARINE PLUS 2T

SAE 20 JASO FB

Barox Marine Plus 2T SAE20 is a lubricating oil for two stroke gasoline engine with air cooling system. This oil is formulated from specific baseoils and excellent performance additive to dissolve easily with gasoline and reducing deposit formation, preventing wear and corrosion of engine parts and protecting against spark-plug fouling.



Properties

- » Wear protection against corrosive combustion
- » Detergent/dispersant properties keeps crakcases and oil control rings clean
- » Oxidation stability
- » Rust protection
- » Balanced additive components

Applications

Barox Marine Plus 2T SAE 20 is suitable for two stroke gasoline engine two stroke air cooled engines such as chainsaw, bajaj, bemo and others.

Meets the requirement	Packaging	item No.
API TC, JASO FB	1L plastic	180001
	4L Plastic	180004
	20L plastic	180020
	208L Drum	180208
	Bulk	180000

BAROX MARINE EXTRA 4T

SAE 30

Barox Marine Extra 4T SAE 30 is a lubricating oil for four stroke gasoline engine with air cooling system. This oil is formulated from specific baseoils and excellent performance additive to dissolve easily with gasoline and reducing deposit formation, preventing wear and corrosion of engine parts and protecting against spark-plug fouling.



Properties

- » Wear protection against corrosive combustion
- » Detergent/dispersant properties keeps crakcases and oil control rings clean
- » Oxidation stability
- » Rust protection
- » Balanced additive components

Applications

Barox Marine Extra 4T SAE 30 are recommended for all types of trunk piston engines , including the latest high-output, medium-speed engines.


Meets the requirement	Packaging	item No.
API TC	1L plastic	181001
	4L Plastic	181004
	20L plastic	181020
	208L Drum	181208
	Bulk	181000





Power is significant when it is not reduced by wear and correctly lubricated. BAROX INFINA is specially formulated ATF and Gear oils for optimal power transferring, best anti-wear efficiency and infinite stability to aging of gears.

PRODUCT NAME			SPECIFICATION	PAGES
Barox	INFINA	ATF Dex VI	GM Dextron VI	36
Barox	INFINA	ATF Dex III H	GM Dextron III H	36
Barox	INFINA	ATF Dex II D/E	GM Dextron II D	36
Barox	INFINA	ATF CVT		37
Barox	INFINA	SAE 75W80	GL5	37
Barox	INFINA	SAE 75W80	GL4	37
Barox	INFINA	SAE 80W90	GL5	38
Barox	INFINA	SAE 80W90	GL4	38
Barox	INFINA	SAE 80W	GL4	38
Barox	INFINA	SAE 140	GL5	39
Barox	INFINA	SAE 85W-140	GL5	39
Barox	INFINA	SAE 90	GL5	39

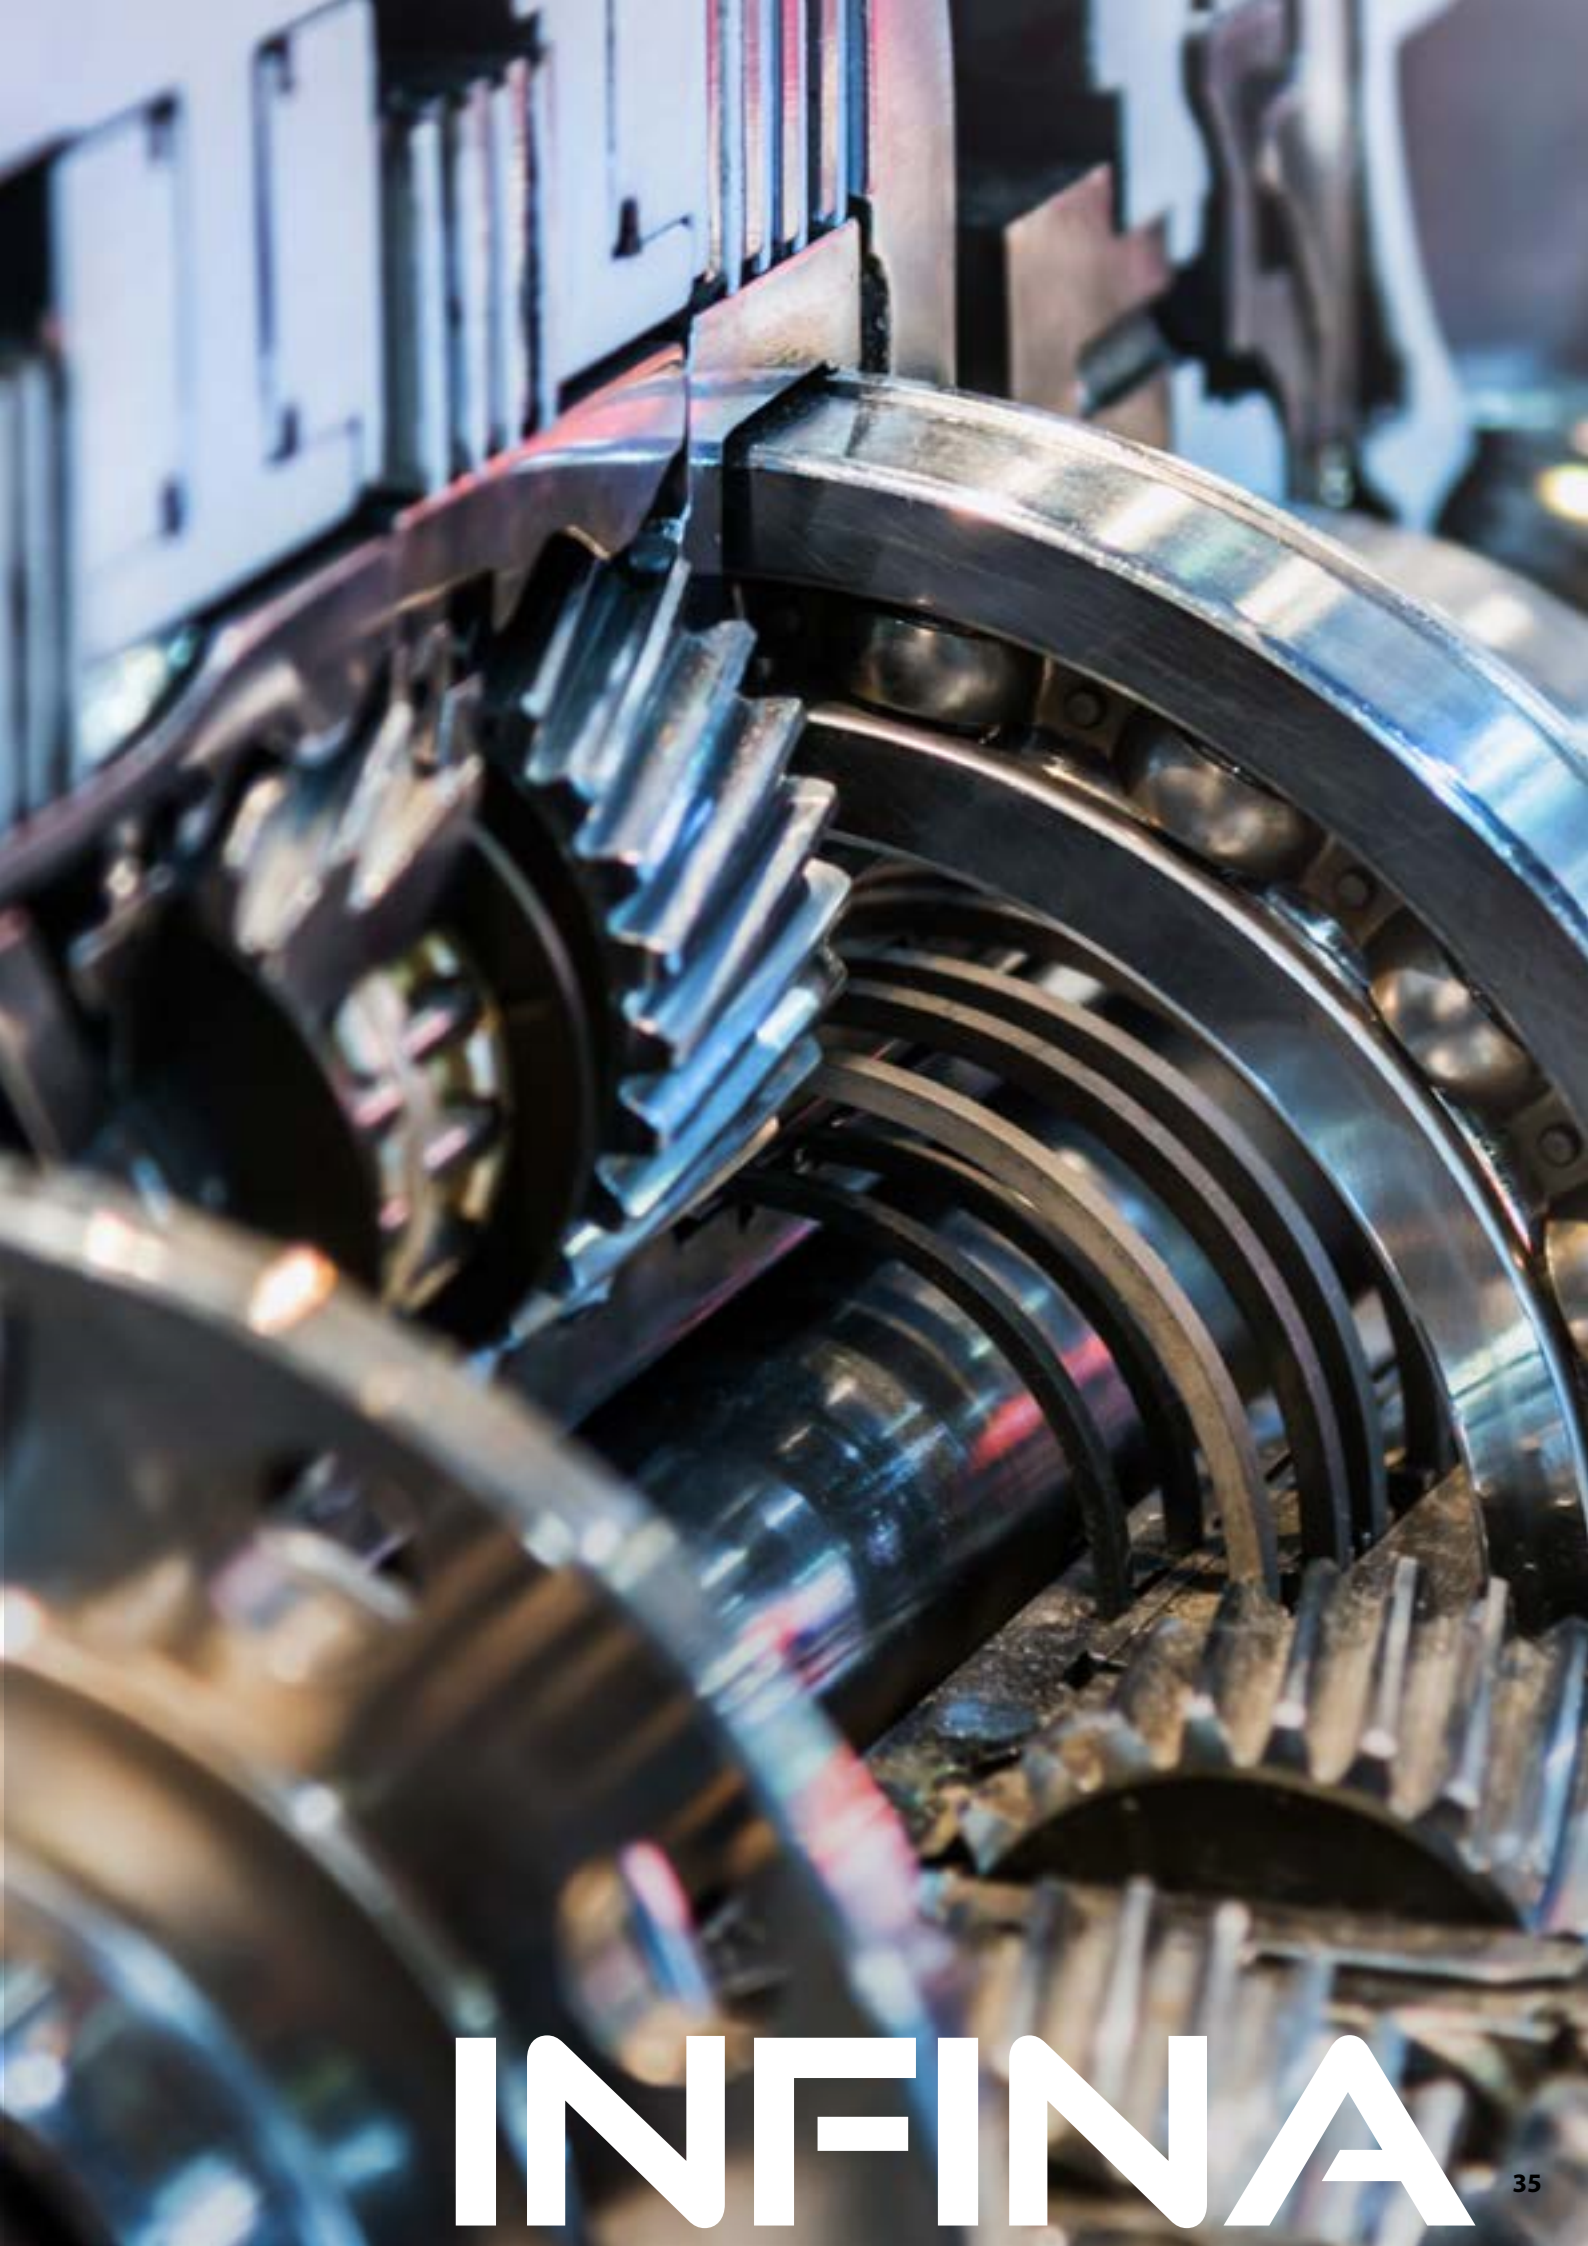



BAROX INFINA
ATF DEX VI



BAROX INFINA ATF DEX VI

Low-viscosity high-performance oil of the new generation for automatic transmissions. It is based on synthesis technology with modern, high-performance additives. Aside from excellent ageing and oxidation stability, optimal shifting is guaranteed under all operating conditions thanks to the extremely high viscosity index. It enables long oil change intervals.

Properties

- » Prevents foam formation
- » Enables a multifaceted range of application
- » Outstanding friction characteristics
- » High resistance to aging
- » Very good low temperature properties
- » Excellent corrosion protection
- » High wear resistance
- » Outstanding resistance to oxidation

Applications

Primarily developed for automatic transmissions of various manufacturers such as Aisin Warner, ZF etc., which are installed in various vehicles of Audi, BMW, Ford, Honda, Hyundai, Jeep, Jaguar, Kia, Land Rover, Lexus, Mazda, Mercedes-Benz, Mini, Opel, Peugeot, Porsche, Toyota, VW, Volvo etc.

Meets the requirement	Packaging	item No.
GM Dexron VI	1L plastic	200001
	4L Plastic	200004
	5L plastic	200005
	208L Drum	200208
	Bulk	200000

BAROX INFINA
CVT



BAROX INFINA CVT

Ultra High Performance ATF specially designed for use in many CVT gearboxes using push-belts or transmission chains made of steel. It is a synthetic automatic transmission fluid based on special technology base oils and additives. It is specially formulated for continuously variable transmission of passenger cars.

Properties

- » protect materials against wear and fatigue.
- » remove foam and provide stability to oxidation.

Applications

Specially designed for modern continuously variable transmissions (CVTs), which rely on high steel-on-steel friction between either a belt or chain and pulleys to transfer power

Meets the requirement	Packaging	item No.
-	1L plastic	220001
	4L Plastic	220004
	5L plastic	220005
	208L Drum	220208
	Bulk	220000

BAROX INFINA
ATF DEX III H



BAROX INFINA ATF DEX III H

Barox Infina ATF DEX III-H is an automatic gear oil from the latest generation based on synthetic HC base oils in combination with the latest high-performance additives. The outstanding composition of various base oil and additive components ensures optimum stability to aging, excellent protection against wear and good friction characteristics. Barox Infina ATF DEX III-H conforms to the requirements of numerous unit and vehicle manufacturers and guarantees perfect operation of the units even under extreme operating conditions and when exposed to large temperature fluctuations. Also suitable for extended oil change intervals.

Properties

- » Highest thermal stability
- » Outstanding viscosity stability
- » Optimum stability to aging
- » Outstanding corrosion protection
- » Outstanding chemical resistance
- » Excellent low temperature behavior
- » Friction and wear reducing

Applications

Used in automatic transmissions, in torque converters and numerous power steering systems in accordance with the specifications and operating instructions specified by the motor vehicle and transmission manufacturers.

Meets the requirement	Packaging	item No.
ATF Dexron III H, Alison C-3&C4,TES-389B, MBZF4HP20, PSA,Renault DPO/AL4, Matic D2, Toyota ATF D-II, D-II, VW G-US 000162.	1L plastic	201001
	4L Plastic	201004
	5L plastic	201005
	208L Drum	201208
	Bulk	201000

BAROX INFINA
SAE 75W80 GL5



BAROX INFINA SAE 75W80 GL5

Fully synthetic hypoid gear oil with extremely high performance reserves. Excellent cold behavior and oxidation stability. Even under the most difficult conditions and during large temperature fluctuations, it ensures flawless aggregate functioning. Minimizes wear. Outstanding viscosity temperature behavior. Enables long oil change intervals.

Properties

- » High & stable viscosity index
- » Strong ageing resistance
- » Excellent cold behavior
- » Minimizes wear
- » High pressure-absorption capability

Applications

For heavy-duty motor vehicle transmissions, particularly with Hypoid gearing for which an API GL 5 type gear oil is specified. Especially uses in cold climate.

Meets the requirement	Packaging	item No.
API GL5 (eqv. MIL-L-2105D) MAN 342 M2 ZF TE-ML 05A, 7A, 12E, 16B,C&D, 17B, 19B, 21A	1L plastic	203001
	4L Plastic	203004
	5L plastic	203005
	208L Drum	203208
	Bulk	203000

BAROX INFINA
ATF DEX II D



BAROX INFINA ATF DEX II D

Barox Infina ATF Dex II-D is a Premium performance automatic transmission oil, formulated with high quality hydrotreated base stocks and advanced additive system including viscosity index improvers, antioxidants, and defoamers providing smooth and controlled friction/wear characteristics, to meet or exceed the requirements of General Motors for Dexron II D specification. Suitable for passenger cars and commercial automatic transmissions, for use in applications like power steering systems and hydraulics where automatic transmission fluid II D is specified.

Properties

- » High shear stability
- » Optimum frictional characteristics
- » Low temperature pumpability and circulation
- » Excellent oxidation & thermal stability
- » Excellent wear protection

Applications

Used in automatic transmissions, in torque converters and numerous power steering systems in accordance with the specifications and operating instructions specified by the motor vehicle and transmission manufacturers.

Meets the requirement	Packaging	item No.
GM Dexron II D	1L plastic	202001
	4L Plastic	202004
	5L plastic	202005
	208L Drum	202208
	Bulk	202000

BAROX INFINA
SAE 75W80 GL4



BAROX INFINA SAE 75W80 GL4

Fully synthetic hypoid gear oil with extremely high performance reserves. Excellent cold behavior and oxidation stability. Even under the most difficult conditions and during large temperature fluctuations, it ensures flawless aggregate functioning. Minimizes wear. Outstanding viscosity temperature behavior. Enables long oil change intervals.

Properties

- » High & stable viscosity index
- » Strong ageing resistance
- » Excellent cold behavior
- » Minimizes wear
- » High pressure-absorption capability

Applications

For heavy-duty motor vehicle transmissions, particularly with Hypoid gearing for which an API GL 4 type gear oil is specified. Especially uses in cold climate.

Meets the requirement	Packaging	item No.
API GL4	1L plastic	205001
	4L Plastic	205004
	5L plastic	205005
	208L Drum	205208
	Bulk	205000



BAROX INFINA
SAE 80W90 GL5

BAROX INFINA SAE 80W90 GL5

Mineral hypoid gear oil with extremely high performance reserves. Excellent ageing stability. Even under the most difficult conditions and during large temperature fluctuations, it ensures flawless aggregate functioning. Minimizes wear. Outstanding viscosity temperature behavior. Enables long oil change intervals.



Properties

- » High pressure-absorption capability
- » Excellent resistance to aging
- » Does not attack common sealing materials
- » Reduces running noise
- » Universal application
- » Rationalizes storage

Applications

Specifically developed for use in commercial vehicles. Universal use TDL oil (total drive line) for shift, auxiliary and differential transmissions without limited-slip differentials. Comply with the vehicle or aggregate manufacturer's instructions.

Meets the requirement	Packaging	item No.
API GL5 , MIL-L-2105 D, MAN342M2, 2F TE-ML 05A, 7A,12E,16B, C&D,17B, 19B, 21A	1L plastic	206001
	4L Plastic	206004
	5L plastic	206005
	208L Drum	206208
	Bulk	206000

BAROX INFINA
SAE 140 API GL5

BAROX INFINA SAE 140 API GL5

Hypoid Gear Oil (GL5) SAE 140 is a high-performance, high-pressure gear oil manufactured from carefully selected base oils and multifunctional extreme pressure additives. This hypoid gear oil is suitable for axle drives – especially for heavy-duty hypoid transmissions.



Properties

- » Reduces running noise
- » High pressure-absorption capability
- » Minimize wear
- » Does not attack common sealing materials
- » Excellent resistance to aging
- » Excellent viscosity/temperatureproperties

Applications

For heavy-duty axle drives with hypoid gearing for which an API GL 5 gear oil is specified.

Meets the requirement	Packaging	item No.
API GL5 , MIL-L-2105 D, MAN342M2, 2F TE-ML 05A, 7A,12E,16B, C&D,17B, 19B, 21A	1L plastic	208001
	4L Plastic	208004
	5L plastic	208005
	208L Drum	208208
	Bulk	208000

BAROX INFINA
SAE 80W90 GL4

BAROX INFINA SAE 80W90 GL4

High-performance, high-pressure gear oil manufactured from carefully selected base oils and multifunctional additives. The oil can therefore be used in a wide range of drives and manual transmissions.



Properties

- » Does not attack common sealing materials
- » Excellent resistance to aging
- » Minimizes wear
- » High pressure-absorption capability
- » Reduces running noise
- » Excellent viscosity/temperature properties

Applications

For transmissions and final drives with normal to high loading.

Meets the requirement	Packaging	item No.
API GL4	1L plastic	204001
	4L Plastic	204004
	5L plastic	204005
	208L Drum	204208
	Bulk	204000

BAROX INFINA
SAE 85W140 API GL5

BAROX INFINA SAE 85W140 API GL5

Mineral based low-viscosity hypoid gear oil. For vehicles with tried and tested transmission technology. Even under the most difficult conditions and during large temperature fluctuations, it ensures flawless mechanical component operation. Greatest lubrication security and maximum wear protection are achieved through its large viscosity bandwidth. Reduces transmission noise.



Properties

- » Excellent resistance to aging
- » Reduces running noise
- » High pressure-absorption capability
- » Does not attack common sealing materials – excellent low temperature behavior
- » Minimizes wear
- » High viscosity

Applications

For heavy-duty motor vehicle transmissions, particularly with Hypoid gearing for which an API GL 5 type gear oil is specified.

Meets the requirement	Packaging	item No.
API GL5 , MIL-L-2105 D, MAN342M2, 2F TE-ML 05A, 7A,12E,16B, C&D,17B, 19B, 21A	1L plastic	209001
	4L Plastic	209004
	5L plastic	209005
	208L Drum	209208
	Bulk	209000

BAROX INFINA
SAE 80W API GL4

BAROX INFINA SAE 80W API GL4

High-performance high-pressure gear oil made from carefully selected base oils and multifunctional “extreme pressure” additives. For powered transmission and axle drives.



Properties

- » Reduces running noise
- » Does not attack common sealing material
- » Excellent resistance to aging
- » Excellent viscosity/temperature properties
- » Minimizes wear
- » High pressure-absorption capability

Applications

For high-load motor vehicle manual transmissions.

Meets the requirement	Packaging	item No.
API GL4	1L plastic	207001
	4L Plastic	207004
	5L plastic	207005
	208L Drum	207208
	Bulk	207000

BAROX INFINA
SAE 90 API GL5

BAROX INFINA SAE 90 API GL5

Hypoid Gear Oil (GL5) SAE 90 is a high-performance, high-pressure gear oil manufactured from carefully selected base oils and multifunctional extreme pressure additives. This hypoid gear oil is suitable for axle drives – especially for heavy-duty hypoid transmissions.



Properties

- » Reduces running noise
- » High pressure-absorption capability
- » Minimize wear
- » Does not attack common sealing materials
- » Excellent resistance to aging
- » Excellent viscosity/temperatureproperties

Applications

For heavy-duty axle drives with hypoid gearing for which an API GL 5 gear oil is specified.

Meets the requirement	Packaging	item No.
API GL5	1L plastic	211001
	4L Plastic	211004
	5L plastic	211005
	208L Drum	211208
	Bulk	211000

BAROX TEMPRA is reliable break fluid for your valuable vehicle, which at the same time provide strong anti-corrosion performance.

PRODUCT NAME			PAGES
Barox	TEMPRA	DOT3	42
Barox	TEMPRA	DOT4	42
Barox	TEMPRA	DOT5	42



TEMPRA



BAROX TEMPRA BRAKE FLUID

DOT 3

Barox Brake Fluid DOT 3
is a high performance hydraulic brake fluid for use in automotive disc, drum and anti-skid brake systems and clutch systems.



Properties <ul style="list-style-type: none">» High boiling point» Minimum rubber component swell» Excellent corrosion protection	Applications Barox Brake Fluid DOT 3 for use in applications where disc, drum and anti-skid braking systems are used in vehicles requiring DOT 3 level performance. Comply with the vehicle or aggregate manufacturer's instructions.	
	Meets the requirement	Packaging item No.
	F.M.V.SS.NO.116	250 ml 290250
		1L 290001
		208L Drum 290208
		Bulk 290000

BAROX TEMPRA BRAKE FLUID

DOT 4

Barox Brake Fluid DOT 4
is a extra high performance hydraulic brake fluid for use in automotive disc, drum and anti-skid brake systems and clutch systems.



Properties <ul style="list-style-type: none">» High boiling point» Minimum rubber component swell» Excellent corrosion protection	Applications Barox Brake Fluid DOT 4 for use in applications where disc, drum and anti-skid braking systems are used in average & high performance vehicles requiring DOT 4 level performance.	
	Meets the requirement	Packaging item No.
	F.M.V.SS.NO.116	250 ml 291250
		1L 291001
		208L Drum 291208
		Bulk 291000

BAROX TEMPRA BRAKE FLUID

DOT 5

Barox Brake Fluid DOT 5
is based on polyethylene glycol ether technology to provide the highest level of brake and clutch performance in modern as well as older model automotive and commercial vehicles.



Properties <ul style="list-style-type: none">» High boiling point» Minimum rubber component swell» Excellent corrosion protection	Applications Barox Brake Fluid DOT 5 for use in applications where disc, drum and anti-skid braking systems are used in average & high performance vehicles requiring DOT 5 level performance.	
	Meets the requirement	Packaging item No.
	F.M.V.SS.NO.116	250 ml 292250
		1L 292001
		208L Drum 292208
		Bulk 292000



BAROX
BOOSTA
hydraulic oil



Power is nothing if it is not managed in right direction. BAROX BOOSTA is formulated to amplify the power of hydraulic system and utilize it correctly.

PRODUCT NAME			SPECIFICATION	FORMER PRODUCTS	PAGES
Barox	BOOSTA	Hydraulic	HLP 32	BAROX HYDRAULIC HLP 32	46
Barox	BOOSTA	Hydraulic	HLP 46	BAROX HYDRAULIC HLP 46	46
Barox	BOOSTA	Hydraulic	HLP 68	BAROX HYDRAULIC HLP 68	46
Barox	BOOSTA	Hydraulic	HVLP 32	BAROX HYDRAULIC HLP 32	47
Barox	BOOSTA	Hydraulic	HVLP 46	BAROX HYDRAULIC HLP 46	47
Barox	BOOSTA	Hydraulic	HVLP 68	BAROX HYDRAULIC HLP 68	47



BOOSTA

08

BAROX BOOSTA HYDRAULIC

HLP 32



BAROX BOOSTA HYDRAULIC HLP 32
High-performance hydraulic oil made from high-quality raffinates. Thanks to the high thermal stability of the base oils, the aging process is significantly reduced even at elevated temperatures. This decisively helps reduce the formation of sludge, improves cleanliness and promotes the reliability of the hydraulic systems. Excellent oxidation resistance permits lengthy oil life (changing intervals). The outstanding wear protection technology is effective in both low and high load conditions. Good corrosion protection behavior even if water is present. The hydraulic components are thus optimally protected in all operating conditions.

Properties	Applications	
» Excellent wear resistance	For stationary and mobile applications in hydraulic systems in construction, forestry and agricultural machinery such as excavators, tractors etc., hoists, industrial machinery and machine tools, wood splitters, lifting platforms and presses, etc.	
» Outstanding corrosion protection		
» Highest thermal stability		
» Does not attack common sealing materials		
Meets the requirement	Packaging	item No.
HLP ISO VG 32, DIN51524/II	4L plastic	300004
	5L Plastic	300005
	20L plastic	300020
	208L Drum	300208
	Bulk	300000

BAROX BOOSTA HYDRAULIC

HVLP 32



BAROX BOOSTA HYDRAULIC HVLP 32
this hydraulic oil is used as a pressure fluid in modern hydraulic systems. It is particularly useful for use in systems that are exposed to strongly fluctuating temperatures. These include outdoor installations such as barriers, scrap presses, locks and weir plants. It must withstand high thermal loads and minimize wear under severe conditions such as shock loads.

Properties	Applications	
» High purity	HVLP conventional hydraulic oils are recommended to be applied to hydraulic systems used in various construction, mining, earth-moving, forestry, and industrial equipment.	
» High thermal-oxidative stability		
» Very good demulsifying capacity and good water separation capacity		
» Excellent wear protection properties		
» Good corrosion protection		
Meets the requirement	Packaging	item No.
HVLP ISO VG 32, DIN 51524/III	4L plastic	303004
	5L Plastic	303005
	20L plastic	303020
	208L Drum	303208
	Bulk	303000

BAROX BOOSTA HYDRAULIC

HLP 46



BAROX BOOSTA HYDRAULIC HLP 46
High performance hydraulic oil made from high quality raffinates. Thanks to the high thermal stability of the base oils, the aging process is significantly reduced even at elevated temperatures. This decisively helps reduce the formation of sludge, improves cleanliness and promotes the reliability of the hydraulic systems. Excellent oxidation resistance permits lengthy oil life (changing intervals). The outstanding wear protection technology is effective in both low and high load conditions. Good corrosion protection behavior even if water is present. The hydraulic components are thus optimally protected in all operating conditions.

Properties	Applications	
» Outstanding thermal stability	For stationary and mobile applications in hydraulic systems in construction, forestry and agricultural machinery such as excavators, tractors etc., hoists, industrial machinery and machine tools, wood splitters, lifting platforms and presses, etc.	
» Outstanding corrosion protection		
» Highest thermal stability		
» Excellent wear resistance		
» Does not attack common sealing materials		
Meets the requirement	Packaging	item No.
HLP ISO VG 46, DIN51524/II	4L plastic	301004
	5L Plastic	301005
	20L plastic	301020
	208L Drum	301208
	Bulk	301000

BAROX BOOSTA HYDRAULIC

HVLP 46



BAROX BOOSTA HYDRAULIC HVLP 46
this hydraulic oil is used as a pressure fluid in modern hydraulic systems. It is particularly useful for use in systems that are exposed to strongly fluctuating temperatures. These include outdoor installations such as barriers, scrap presses, locks and weir plants. It must withstand high thermal loads and minimize wear under severe conditions such as shock loads.

Properties	Applications	
» High purity	HVLP conventional hydraulic oils are recommended to be applied to hydraulic systems used in various construction, mining, earth-moving, forestry, and industrial equipment.	
» High thermal-oxidative stability		
» Very good demulsifying capacity and good water separation capacity		
» Excellent wear protection properties		
» Good corrosion protection		
Meets the requirement	Packaging	item No.
HVLP ISO VG 46, DIN 51524/III	4L plastic	304004
	5L Plastic	304005
	20L plastic	304020
	208L Drum	304208
	Bulk	304000

BAROX BOOSTA HYDRAULIC

HLP 68



BAROX BOOSTA HYDRAULIC HLP 68
High-performance hydraulic oil made from high quality raffinates. Because of the high thermal stability of the base oils, the aging process is significantly reduced even at elevated temperatures. This decisively helps to reduce the formation of sludge, improve cleanliness, and promote the reliability of the hydraulic systems. Excellent oxidation resistance permits extended oil change intervals. The outstanding wear-protection technology is effective in both, low and high load conditions. Maintains good corrosion protection behavior even if water is present. The hydraulic components are thus optimally protected in all operating conditions.

Properties	Applications	
» High lubrication reliability	For stationary and mobile applications in hydraulic systems in construction, forestry and agricultural machinery such as excavators, tractors etc., hoists, industrial machinery and machine tools, wood splitters, lifting platforms and presses, etc.	
» Outstanding corrosion protection		
» Outstanding thermal stability		
» High resistance to aging		
» Does not attack common sealing materials		
» Excellent wear resistance		
Meets the requirement	Packaging	item No.
HLP ISO VG 68, DIN51524/II	4L plastic	302004
	5L Plastic	302005
	20L plastic	302020
	208L Drum	302208
	Bulk	302000

BAROX BOOSTA HYDRAULIC

HVLP 68




BAROX BOOSTA HYDRAULIC HVLP 68
this hydraulic oil is used as a pressure fluid in modern hydraulic systems. It is particularly useful for use in systems that are exposed to strongly fluctuating temperatures. These include outdoor installations such as barriers, scrap presses, locks and weir plants. It must withstand high thermal loads and minimize wear under severe conditions such as shock loads.

Properties	Applications	
» High purity	HVLP conventional hydraulic oils are recommended to be applied to hydraulic systems used in various construction, mining, earth-moving, forestry, and industrial equipment.	
» High thermal-oxidative stability		
» Very good demulsifying capacity and good water separation capacity		
» Excellent wear protection properties		
» Good corrosion protection		
Meets the requirement	Packaging	item No.
HVLP ISO VG 68, DIN 51524/III	4L plastic	305004
	5L Plastic	305005
	20L plastic	305020
	208L Drum	305208
	Bulk	305000



BAROX GEAR is specially formulated Industrial Gear oils for optimal power transferring, best anti-wear efficiency and infinite stability to aging of gears.

PRODUCT NAME			PAGES
Barox	GEAR	CLP 68	50
Barox	GEAR	CLP 100	50
Barox	GEAR	CLP 150	50
Barox	GEAR	CLP 220	51
Barox	GEAR	CLP 320	51
Barox	GEAR	CLP 460	51
Barox	GEAR	CLP 680	52

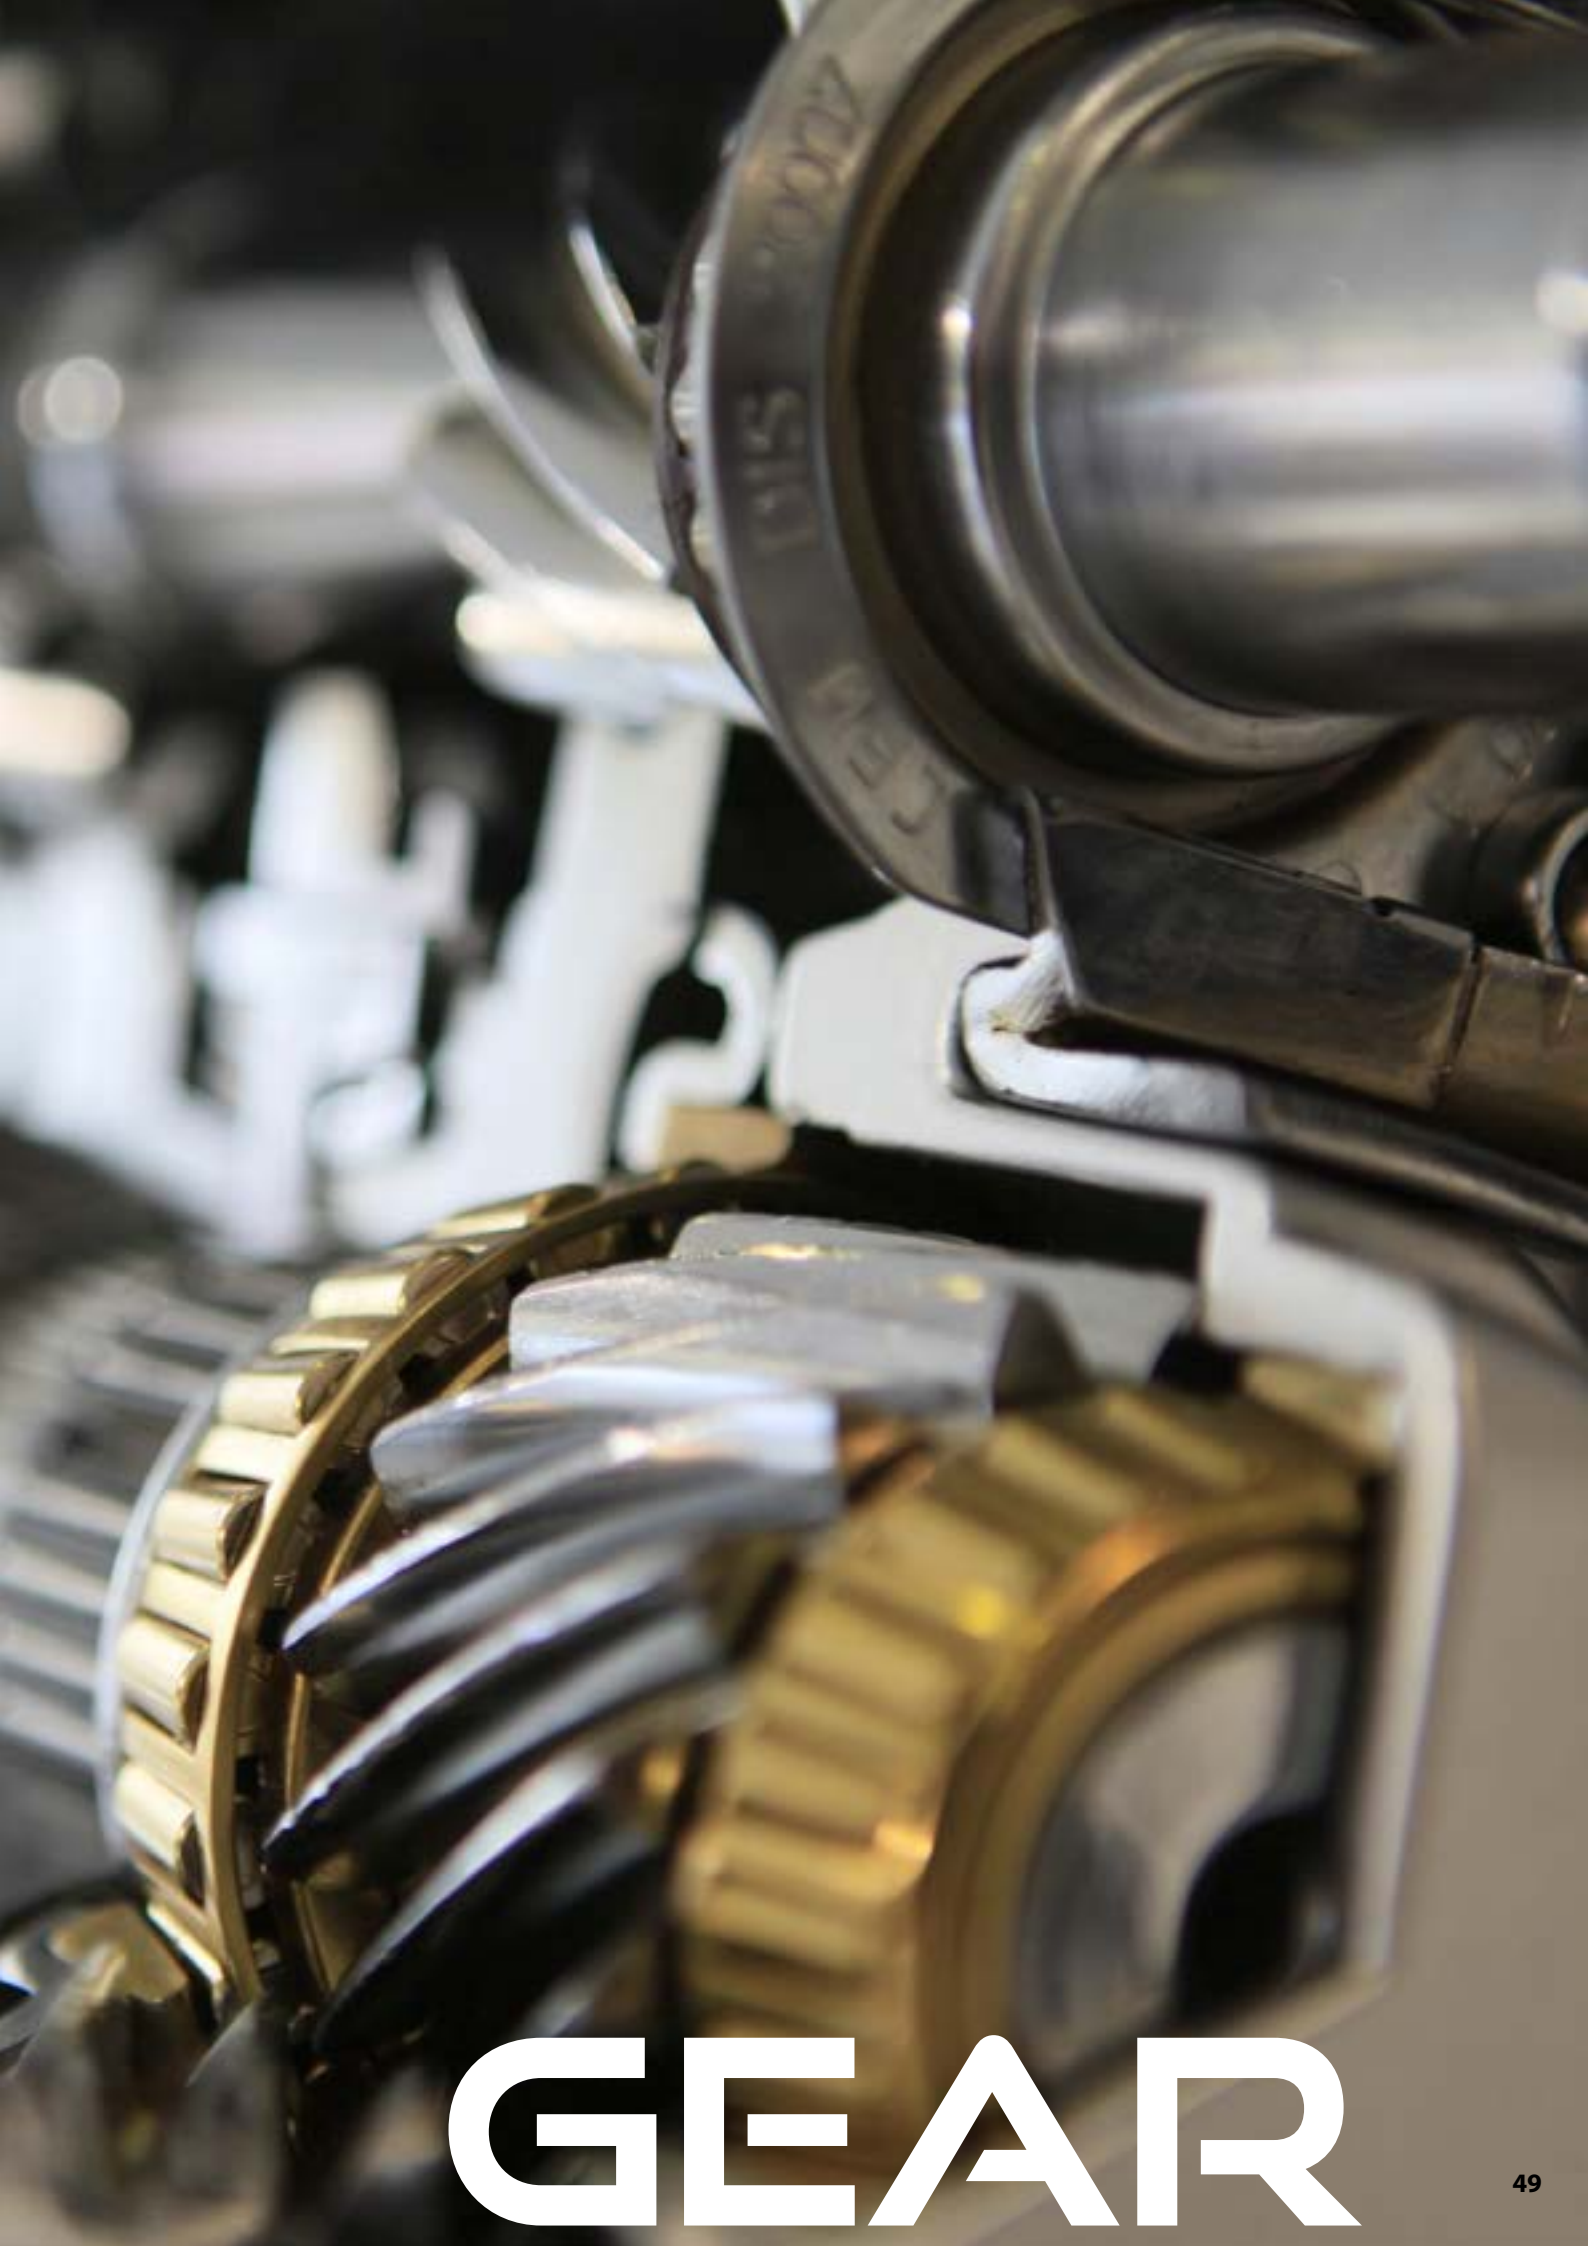

BAROX GEAR

CLP VG 68



BAROX GEAR CLP VG 68
BAROX GEAR CLP-Oils are modern high-performance gear oils based on especially selected base oils showing excellent thermal stability, good ageing stability as well as extraordinary wear protecting properties.

Properties

- » Highest load carrying capacity
- » Excellent wear protection
- » Good stability agaisnt aging
- » High thermal stability
- » Minimum formation of foam
- » Excellent corrosion protection

Applications

BAROX GEAR CLP-Oils are used in industrial gear boxes subject to high loads, e.g. spur gears, bevel gears and planetary gears.

Meets the requirement	Packaging	item No.
DIN 51517/III, AGMA 9005-F16(AS) , ISO 12925-1(CKC), JIS K2219:2006	1L plastic	401001
	4L Plastic	401004
	20L plastic	401020
	208L Drum	401208
	Bulk	401000

BAROX GEAR

CLP VG 220



BAROX GEAR CLP VG 220
BAROX GEAR CLP-Oils are modern high-performance gear oils based on especially selected base oils showing excellent thermal stability, good ageing stability as well as extraordinary wear protecting properties.

Properties

- » Highest load carrying capacity
- » Excellent wear protection
- » Good stability agaisnt aging
- » High thermal stability
- » Minimum formation of foam
- » Excellent corrosion protection

Applications

BAROX GEAR CLP-Oils are used in industrial gear boxes subject to high loads, e.g. spur gears, bevel gears and planetary gears.

Meets the requirement	Packaging	item No.
DIN 51517/III, AGMA 9005-F16(AS) , ISO 12925-1(CKC), JIS K2219:2006	1L plastic	405001
	4L Plastic	405004
	20L plastic	405020
	208L Drum	405208
	Bulk	405000

BAROX GEAR

CLP VG 100



BAROX GEAR CLP VG 100
BAROX GEAR CLP-Oils are modern high-performance gear oils based on especially selected base oils showing excellent thermal stability, good ageing stability as well as extraordinary wear protecting properties.

Properties

- » Highest load carrying capacity
- » Excellent wear protection
- » Good stability agaisnt aging
- » High thermal stability
- » Minimum formation of foam
- » Excellent corrosion protection

Applications

BAROX GEAR CLP-Oils are used in industrial gear boxes subject to high loads, e.g. spur gears, bevel gears and planetary gears.

Meets the requirement	Packaging	item No.
DIN 51517/III, AGMA 9005-F16(AS) , ISO 12925-1(CKC), JIS K2219:2006	1L plastic	402001
	4L Plastic	402004
	20L plastic	402020
	208L Drum	402208
	Bulk	402000

BAROX GEAR

CLP VG 320



BAROX GEAR CLP VG 320
BAROX GEAR CLP-Oils are modern high-performance gear oils based on especially selected base oils showing excellent thermal stability, good ageing stability as well as extraordinary wear protecting properties.

Properties

- » Highest load carrying capacity
- » Excellent wear protection
- » Good stability agaisnt aging
- » High thermal stability
- » Minimum formation of foam
- » Excellent corrosion protection

Applications

BAROX GEAR CLP-Oils are used in industrial gear boxes subject to high loads, e.g. spur gears, bevel gears and planetary gears.

Meets the requirement	Packaging	item No.
DIN 51517/III, AGMA 9005-F16(AS) , ISO 12925-1(CKC), JIS K2219:2006	1L plastic	406001
	4L Plastic	406004
	20L plastic	406020
	208L Drum	406208
	Bulk	406000

BAROX GEAR

CLP VG 150



BAROX GEAR CLP VG 150
BAROX GEAR CLP-Oils are modern high-performance gear oils based on especially selected base oils showing excellent thermal stability, good ageing stability as well as extraordinary wear protecting properties.

Properties

- » Highest load carrying capacity
- » Excellent wear protection
- » Good stability agaisnt aging
- » High thermal stability
- » Minimum formation of foam
- » Excellent corrosion protection

Applications

BAROX GEAR CLP-Oils are used in industrial gear boxes subject to high loads, e.g. spur gears, bevel gears and planetary gears.

Meets the requirement	Packaging	item No.
DIN 51517/III, AGMA 9005-F16(AS) , ISO 12925-1(CKC), JIS K2219:2006	1L plastic	403001
	4L Plastic	403004
	20L plastic	403020
	208L Drum	403208
	Bulk	403000

BAROX GEAR

CLP VG 460



BAROX GEAR CLP VG 460
BAROX GEAR CLP-Oils are modern high-performance gear oils based on especially selected base oils showing excellent thermal stability, good ageing stability as well as extraordinary wear protecting properties.

Properties

- » Highest load carrying capacity
- » Excellent wear protection
- » Good stability agaisnt aging
- » High thermal stability
- » Minimum formation of foam
- » Excellent corrosion protection

Applications

BAROX GEAR CLP-Oils are used in industrial gear boxes subject to high loads, e.g. spur gears, bevel gears and planetary gears.

Meets the requirement	Packaging	item No.
DIN 51517/III, AGMA 9005-F16(AS) , ISO 12925-1(CKC), JIS K2219:2006	1L plastic	407001
	4L Plastic	407004
	20L plastic	407020
	208L Drum	407208
	Bulk	407000

BAROX GEAR
CLP VG 680

BAROX GEAR CLP VG 680
BAROX GEAR CLP-Oils are modern high-performance gear oils based on especially selected base oils showing excellent thermal stability, good ageing stability as well as extraordinary wear protecting properties.



- Properties**

 - » Highest load carrying capacity
 - » Excellent wear protection
 - » Good stability against aging
 - » High thermal stability
 - » Minimum formation of foam
 - » Excellent corrosion protection
- Applications**

BAROX GEAR CLP-Oils are used in industrial gear boxes subject to high loads, e.g. spur gears, bevel gears and planetary gears.

Meets the requirement	Packaging	item No.
DIN 51517/III, AGMA 9005-F16(AS), ISO 12925-1(CKC), JIS K2219:2006	1L plastic	408001
	4L Plastic	408004
	5L plastic	408020
	208L Drum	408208
	Bulk	408000



BAROX COOLA is our multifunctional coolant for all type of vehicles.

PRODUCT NAME			PAGES
Barox	COOLA REVO	CONCENTRATED	56
Barox	COOLA REVO	PREMIX	56
Barox	COOLA	CONCENTRATED	56
Barox	COOLA	PREMIX	57



BAROX COOLA REVO

CONCENTRATED



BAROX COOLA REVO Antifreeze Concentrate is a nitrite, amine and phosphate-free cost efficient coolant concentrate. It offers freezing, boiling and corrosion protection.

Properties	Applications	
» Provides effective long-term anti-corrosion support by protecting brass, cast iron, steel, solder, and copper components. » Provides superior high-temperature protection for aluminum components.	Offers good corrosion protection to a wide range of metals Compatible with a range of seal materials, contributing to leak protection Promotes efficient freeze protection and boiling resistance. Recommended mixing rate with water 1:1 for all seasons.	
Meets the requirement	Packaging	item No.
BS6580, SAE J1034, ASTM3306 AND 4985, PSA B715110	1L plastic	701001
	4L Plastic	701004
	20L plastic	701020
	208L Drum	701208
	Bulk	701000

BAROX COOLA

PREMIX



BAROX COOLA Antifreeze/Coolant premix is a economical corrosion inhibitor and antifreeze premix for radiator in water cooled vehicles. It is free of silicates, nitrites, nitrates, amine and phosphates. This anti-freeze provide excellent frost and corrosion protection without any negative effect on coolant hoses or gaskets.

Properties	Applications	
» Provides effective long-term anti-corrosion support by protecting brass, cast iron, steel, solder, and copper components. » Provides superior high-temperature protection for aluminum components.	Offers good corrosion protection to a wide range of metals Compatible with a range of seal materials, contributing to leak protection Promotes efficient freeze protection and boiling resistance	
Meets the requirement	Packaging	item No.
BS6580 MB 325.3, MAN N/248/324 FORD ESE, RE-NAULT 41-01-001 PORSCHE/VW/AUDI/SEAT/SKODA TL 774 D	1L plastic	704001
	4L Plastic	704004
	20L plastic	704020
	208L Drum	704208
	Bulk	704000

BAROX COOLA REVO

PREMIX



BAROX COOLA REVO Antifreeze/PREMIX is a high performance corrosion inhibitor and anti-freeze for radiator in water cooled vehicles with a long life protection of all metals of the engine, cooling system and free of borates, phosphates, silicates, nitrite, amine and nitrates coolant premix. It offers freezing, boiling and corrosion protection.

Properties	Applications	
» Provides effective long-term anti-corrosion support by protecting brass, cast iron, steel, solder, and copper components. » Provides superior high-temperature protection for aluminum components.	Offers good corrosion protection to a wide range of metals Compatible with a range of seal materials, contributing to leak protection Promotes efficient freeze protection and boiling resistance.	
Meets the requirement	Packaging	item No.
BS6580, SAE J1034, ASTM3306 AND 4985, PSA B715110	1L plastic	702001
	4L Plastic	702004
	20L plastic	702020
	208L Drum	702208
	Bulk	702000

BAROX COOLA

CONCENTRATED



BAROX COOLA Antifreeze/Coolant Concentrate is a economical corrosion inhibitor and antifreeze concentrate for radiator in water cooled vehicles. It is free of silicates, nitrites, nitrates, amine and phosphates. This anti-freeze provide excellent frost and corrosion protection without any negative effect on coolant hoses or gaskets.

Properties	Applications	
» Provides effective long-term anti-corrosion support by protecting brass, cast iron, steel, solder, and copper components. » Provides superior high-temperature protection for aluminum components.	Offers good corrosion protection to a wide range of metals Compatible with a range of seal materials, contributing to leak protection Promotes efficient freeze protection and boiling resistance. Recommended mixing rate with water 1:1 for all seasons.	
Meets the requirement	Packaging	item No.
BS6580 MB 325.3, MAN N/248/324 FORD ESE, RE-NAULT 41-01-001 PORSCHE/VW/AUDI/SEAT/SKODA TL 774 D	1L plastic	703001
	4L Plastic	703004
	20L plastic	703020
	208L Drum	703208
	Bulk	703000





BAROX ALPHA GREASES ARE SPECIALLY FORMULATED GREASES FOR HIGH QUALITY FOR BEST PERFORMANCE

PRODUCT NAME				PAGES
Barox	ALPHA	LI M 100-B2	LITHIUM BASE MULTI-PURPOSE GREASE	60
Barox	ALPHA	LI M 200-B2	EXTREME PERFORMANCE MULTI-PURPOSE GREASE	60
Barox	ALPHA	LI M 220-2MC	HIGH PRESSURE LIFE GREASE	60
Barox	ALPHA	LI M 150-2MoS2	LITHIUM BASE (WITH 3% MOLY) MULTI-PURPOSE GREASE	61
Barox	ALPHA	AL M 430-00	HEAVY DUTY GEAR FLOW GREASE	61
Barox	ALPHA	LI M 460-2MoS2	FRICTION-REDUCING HIGH-PRESSURE GREASE WITH MOS2	61

BAROX ALPHA

LI M 100-B2 – lithium base multi-purpose grease for roller and friction bearings

BAROX ALPHA LI M 100-B2 provides great lubrication for roller and friction bearings. It is suitable for use in cars, construction machines, and agricultural machines. Provides excellent lubrication even under wet or dry/dusty working conditions.



Technical data	
» Basic Viscosity	100 mm2/s (40°C)
» Temperature range	-30°C to +120°C
» Temp. Short Term	Up to 130°C
» Drop Point	~185°C
» DIN51502	
» K 2 K-20	
» NLGI 2	

Packaging	item No.
400g cartri.	501400
1kg Plas. Pail	501001
5kg Bucket	501005
18kg Bucket	501018
180kg drum	501180

BAROX ALPHA

LI M 150-2MoS2 – lithium base (with 3% moly) multi-purpose grease for roller and friction bearings

BAROX ALPHA LI M 150-2MoS2 provides great lubrication for roller and friction bearings. It is suitable for use in cars, construction machines, and agricultural machines. Provides excellent lubrication even under wet or dry/dusty working conditions.



Technical data	
» Basic Viscosity	155 mm2/s (40°C)
» Temperature range	-30°C to +120°C
» Temp. Short Term	Up to 150°C
» Drop Point	~190°C
» DIN51502	
» K 2 K-20	
» NLGI 2	

Packaging	item No.
400g cartri.	504400
1kg Plas. Pail	504001
5kg Bucket	504005
18kg Bucket	504018
180kg drum	504180

BAROX ALPHA

LI M 200-B2 – extreme performance multi-purpose grease

BAROX ALPHA LI M 200-B2 provides great lubrication for roller and friction bearings. It is suitable for use in cars, construction machines, and agricultural machines. Provides excellent lubrication even under wet or dry/dusty working conditions.



Technical data	
» Basic Viscosity	190 mm2/s (40°C)
» Temperature range	-30°C to +130°C
» Temp. Short Term	Up to 150°C
» Drop Point	~190°C
» DIN51502	
» K 2 K-20	
» NLGI 2	

Packaging	item No.
400g cartri.	502400
1kg Plas. Pail	502001
5kg Bucket	502005
18kg Bucket	502018
180kg drum	502180

BAROX ALPHA

AL M 430-00– heavy duty gear flow grease

BAROX ALPHA AL M 430-00 is a modern, semifluid gear grease based on aluminium complex for the lubrication of gears, including worm gears, with high demands on performance. It is very adhesive, anti-corrosive and wear-reducing. Suitable for longterm lubrication at extremely high loads.



Technical data	
» Basic Viscosity	430 mm2/s (40°C)
» Temperature range	-30°C to +120°C
» Temp. Short Term	Up to 280°C
» Drop Point	
» DIN51502	
» K 2 K-20	
» NLGI 2	

Packaging	item No.
400g cartri.	505400
1kg Plas. Pail	505001
5kg Bucket	505005
18kg Bucket	505018
180kg drum	505180

BAROX ALPHA

LI M 220-2MC – high pressure long-life grease

BAROX ALPHA LI M 220-2MC provides great lubrication for roller and friction bearings. It is suitable for use in cars, construction machines, and agricultural machines. Provides excellent lubrication even under wet or dry/dusty working conditions.

Technical data	
» Basic Viscosity	220 mm2/s (40°C)
» Temperature range	-30°C to +120°C
» Temp. Short Term	Up to 150°C
» Drop Point	~190°C
» DIN51502	
» K 2 K-20	
» NLGI 2	

Packaging	item No.
400g cartri.	503400
1kg Plas. Pail	503001
5kg Bucket	503005
18kg Bucket	503018
180kg drum	503180

BAROX ALPHA

LI M 460-2MoS2 – high-pressure grease with MoS2 for heavy-duty lubrication

BAROX ALPHA LI M 460-2MoS2 provides great lubrication for roller and friction bearings. It is suitable for use in cars, construction machines, and agricultural machines. Provides excellent lubrication even under wet or dry/dusty working conditions.



Technical data	
» Basic Viscosity	460 mm2/s (40°C)
» Temperature range	-30°C to +120°C
» Temp. Short Term	Up to 130°C
» Drop Point	~200°C
» DIN51502	
» K 2 K-20	
» NLGI 2	

Packaging	item No.
400g cartri.	506400
1kg Plas. Pail	506001
5kg Bucket	506005
18kg Bucket	506018
180kg drum	503180



Barox GmbH manufacturing the lubricant using the most innovative equipment with the most advanced materials. Innovative Blenders will make the formulation more stable. The latest Modern Italian filling lines are making the BAROX products more accurate. Fully Automatic Robotic lines securing our products from contamination. We have a 75,000MT production capacity per Annum.

75,000MT



CONTACTS AND DISTRIBUTION

EUROPE:

BAROX GmbH Emil-Eigner-Str. 86720
Nördlingen, Germany
Tel: +49 9081 240425-0
WWW.BAROXOIL.DE



MIDDLE EAST:

VANOL FZE
S40805, JEBEL ALI FREE ZONE, DUBAI, UAE
Tel: +971 4 250 9992
WWW.VANOL.COM